




# PRODUCT CATALOGUE



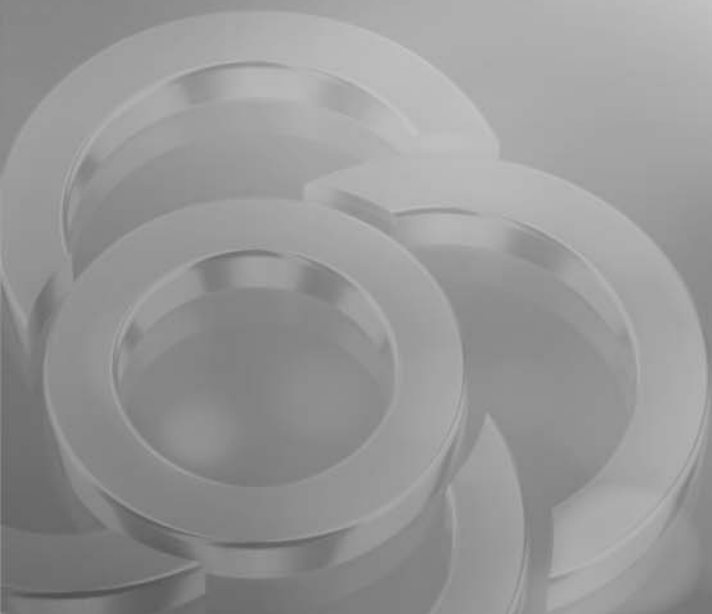

Safe,  
Durable  
and Nature-  
friendly






Solinox is Turkey based company dedicated to the development of high quality stainless steel chimney systems and associated accessories, Solinox has grown over the last 10 years to become one of Turkey's largest and most respected stainless steel chimney manufacturers.

It constantly monitors and develops in accordance with the latest trends and directions in the field of new technologies and successfully applies and

implements them in products. Our goal is to provide customers with a functional product that combines quality, aesthetics and affordability. All products are tested by independent institutions and have all the necessary certificates of quality, environmental safety and CE marking.

The product range offers a wide variety to satisfy the desires of each customer according to his preferences, needs and financial capabilities. The high quality of the input materials and high quality manufacturing ensure high reliability and long service life of the chimney systems.



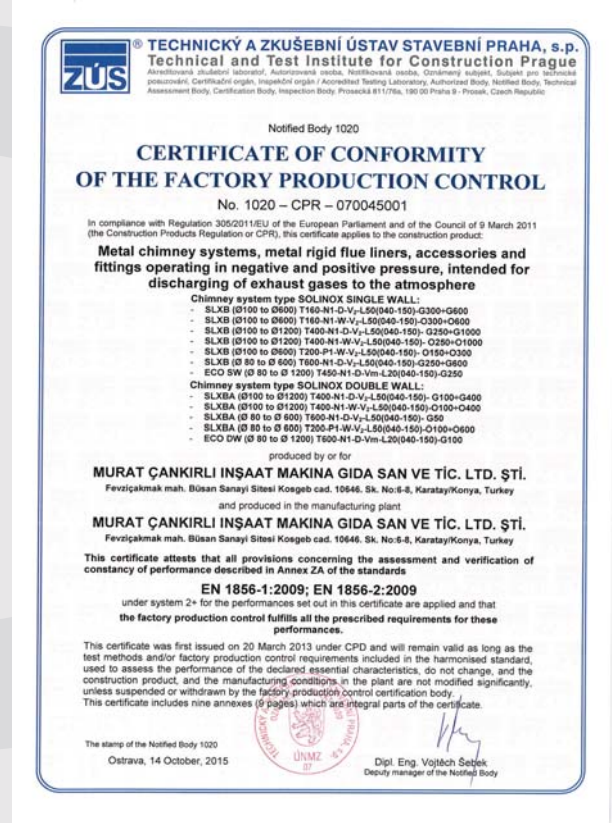

As Solinox Chimney Systems brand all of our products are in accordance with the European standards and gone through all the tests and have the; CE-EN 1856-1, CE-EN1856-2 and ISO9001:2008 certificates.



Chimney is a structure for venting hot flue gases or smoke from a boiler, stove, furnace or fireplace to the outside atmosphere. Chimneys are typically vertical or as near as possible to vertical to ensure that the gases flow smoothly.

The height of chimneys plays a role in their ability to transfer flue gases using stack effect, the dispersion of pollutants at higher altitude helps to ease down its influence on surroundings. In the case of chemically aggressive output, the tall chimney allows partial or complete self-neutralization of chemicals in the air before they reach the ground. The dispersion of pollutants over greater area reduces their concentrations in compliance with regulatory limits.


Chimney is the most important part of any combustion plants and can significantly affect the operation of it, and should therefore not compromise on quality; your chimney should be able to clear it work optimally - now and for years to come.

For boilers and stoves which creates a negative pressure (natural) chimney has another important role, it provides the necessary oxygen for combustion.

### Advantages of stainless steel chimney;

- Lightweight.
- Attractive appearance.
- Fast and easy installation.
- Moisture and corrosion resistance.
- For all types of fuels and appliances.
- The possibility of additional changes.
- After installation immediately usable.
- Interestingly operate both indoors and outdoors.
- Smooth surface helps to prevent the buildup of creosote.
- Stainless steel chimney can be used where it is not possible to stand up straight chimney.

## CHIMNEY DESIGNATION

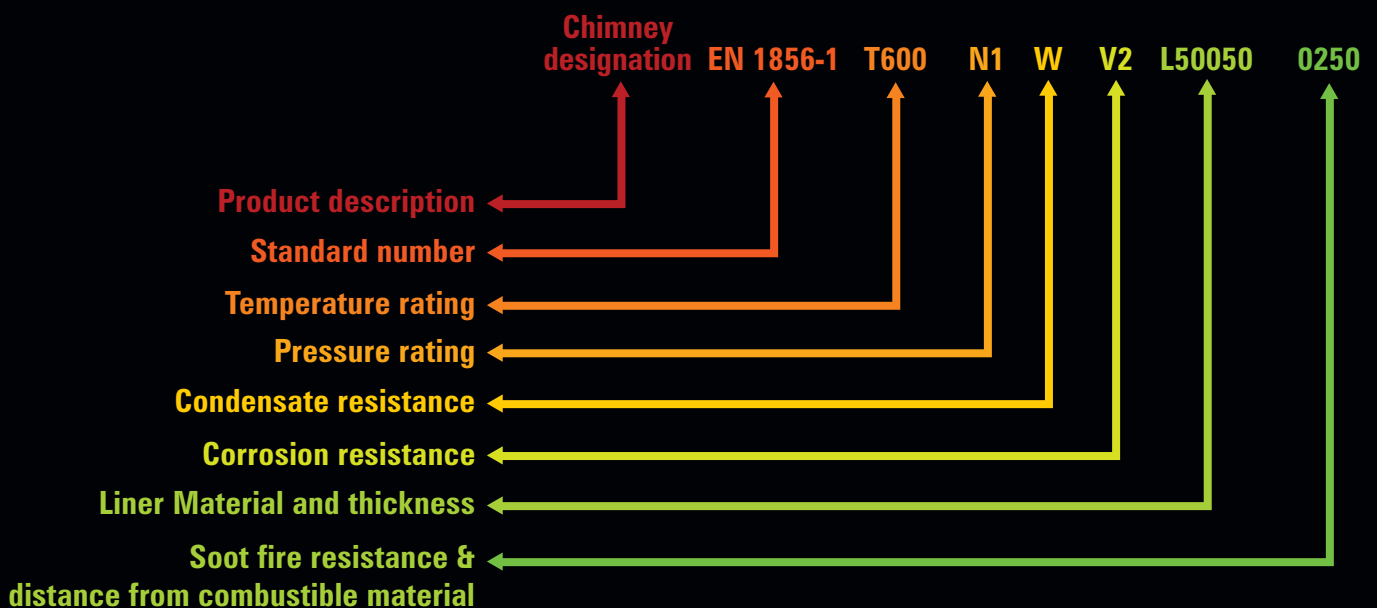



### Elbow (15°) x 2

Ø	H	V
100	300	38
130	309	39
150	313	39
180	372	42
200	377	43
230	383	44
250	390	45
300	404	47
350	416	48
400	429	50
450	442	52

### Pipe250 + Elbow (15°) x 2

Ø	H	V
100	495	91
130	500	91
150	507	91
180	567	93
200	572	93
230	578	94
250	584	95
300	598	98
350	610	99
400	623	100
450	636	103

### Pipe500 + Elbow (15°) x 2

Ø	H	V
100	735	155
130	745	155
150	748	155
180	808	157
200	813	157
230	820	158
250	827	159
300	839	161
350	852	163
400	865	164
450	878	166

### Pipe1000 + Elbow (15°) x 2

Ø	H	V
100	1220	284
130	1223	285
150	1231	285
180	1291	287
200	1296	287
230	1302	288
250	1308	289
300	1322	292
350	1335	293
400	1348	295
450	1360	297

### Elbow (30°) x 2

Ø	H	V
100	311	84
130	325	88
150	336	90
180	350	95
200	361	97
230	374	100
250	386	104
300	410	107
350	434	116
400	460	123
450	485	130

### Pipe250 + Elbow (30°) x 2

Ø	H	V
100	484	184
130	500	188
150	509	190
180	524	194
200	534	197
230	547	200
250	559	204
300	584	210
350	605	219
400	630	226
450	655	232

### Pipe500 + Elbow (30°) x 2

Ø	H	V
100	700	309
130	716	313
150	726	315
180	733	320
200	750	322
230	763	326
250	775	329
300	800	335
350	822	344
400	846	350
450	871	357

### Pipe1000 + Elbow (30°) x 2

Ø	H	V
100	1133	558
130	1148	562
150	1158	565
180	1165	567
200	1183	572
230	1195	575
250	1208	578
300	1233	585
350	1255	594
400	1279	600
450	1304	607

### Elbow (45°) x 2

Ø	H	V
100	309	330
130	330	344
150	344	366
180	366	380
200	380	397
230	397	415
250	415	450
300	450	486
350	486	521
400	521	556
450	556	591

### Pipe250 + Elbow (45°) x 2

Ø	H	V
100	450	472
130	472	486
150	486	508
180	508	522
200	522	539
230	539	557
250	557	592
300	592	628
350	628	663
400	663	698
450	698	733

### Pipe500 + Elbow (45°) x 2

Ø	H	V
100	627	649
130	649	663
150	663	684
180	684	698
200	698	716
230	716	734
250	734	780
300	780	804
350	804	840
400	840	875
450	875	910

### Pipe1000 + Elbow (45°) x 2

Ø	H	V
100	981	1000
130	1000	1016
150	1016	1038
180	1038	1052
200	1052	1069
230	1069	1087
250	1087	1122
300	1122	1158
350	1158	1193
400	1193	1228
450	1228	1263

### T90 + Elbow (45°) x 2

Ø	H	V
130	243	218
150	218	233
180	233	243
200	243	256
230	256	268
250	268	293
300	293	318
350	318	343
400	343	368
450	368	393

### T90+Pipe250 + Elbow (45°) x 2

Ø	H	V
130	350	517
150	360	545
180	375	563
200	385	586
230	398	609
250	410	656
300	435	720
350	460	746
400	485	790
450	510	834

### T90+Pipe500 + Elbow (45°) x 2


Ø	H	V
130	527	676
150	537	694
180	552	722
200	562	740
230	575	763
250	587	785
300	612	830
350	637	875
400	662	920
450	687	965

### T90+Pipe1000 + Elbow (45°) x 2

Ø	H	V
130	880	1029
150	890	1047
180	905	1075
200	915	1093
230	928	1117
250	940	1140
300	965	1184
350	990	1228
400	1015	1272
450	1040	1316


# MODULE TECHNIQUE

**T90 + Elbow (15°) x 2**




Ø	130	150	180	200	230	250	300	350	400	450
H	41	41	42	43	44	45	47	48	50	52
V	406	420	440	454	482	490	520	575	588	621

**T90+Pipe250 + Elbow (15°) x 2**




Ø	130	150	180	200	230	250	300	350	400	450
H	92	93	94	95	96	97	99	100	102	104
V	598	613	633	647	663	680	714	768	781	814

**T90+Pipe500 + Elbow (15°) x 2**




Ø	130	150	180	200	230	250	300	350	400	450
H	157	158	184	160	161	162	163	165	167	168
V	839	854	875	888	905	922	955	1010	1023	1056

**T90+Pipe1000 + Elbow (15°) x 2**




Ø	130	150	180	200	230	250	300	350	400	450
H	286	287	289	289	290	291	293	295	296	298
V	1322	1337	1358	1371	1388	1405	1438	1493	1506	1539

**T90 + Elbow (30°) x 2**




Ø	130	150	180	200	230	250	300	350	400	450
H	88	90	95	97	102	104	111	117	124	131
V	423	442	470	488	511	534	579	646	671	716

**T90+Pipe250 + Elbow (30°) x 2**




Ø	130	150	180	200	230	250	300	350	400	450
H	188	190	195	197	200	204	211	217	224	231
V	597	615	643	660	683	707	752	819	844	889

**T90+Pipe500 + Elbow (30°) x 2**




Ø	130	150	180	200	230	250	300	350	400	450
H	313	316	320	322	325	329	336	342	349	356
V	813	831	859	877	900	923	963	1035	1060	1105

**T90+Pipe1000 + Elbow (30°) x 2**




Ø	130	150	180	200	230	250	300	350	400	450
H	563	566	570	572	575	579	586	592	599	606
V	1246	1264	1292	1310	1333	1356	1400	1468	1493	1538

**T90 + Elbow (45°) x 2**




Ø	130	150	180	200	230	250	300	350	400	450
H	173	143	152	158	166	173	188	202	216	231
V	464	450	484	506	535	563	618	696	731	786

**T90+Pipe250 + Elbow (45°) x 2**




Ø	130	150	180	200	230	250	300	350	400	450
H	279	285	294	300	307	315	329	344	359	373
V	569	591	625	648	676	704	759	837	872	928

**T90+Pipe500 + Elbow (45°) x 2**




Ø	130	150	180	200	230	250	300	350	400	450
H	456	462	471	476	483	491	506	521	535	550
V	746	768	802	824	853	881	936	1013	1049	1104

**T90+Pipe1000 + Elbow (45°) x 2**

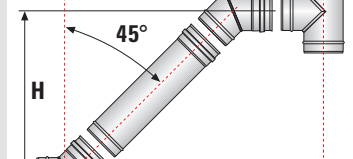


Ø	130	150	180	200	230	250	300	350	400	450
H	810	815	824	830	838	845	860	874	888	903
V	1100	1122	1156	1178	1207	1235	1290	1367	1402	1458

**T45 + Elbow (45°) x 1**




Ø	130	150	180	200	230	250	300	350	400	450
H	670	682	693	705	715	724	732	743	750	764
V	302	310	316	328	339	347	352	364	371	388

**T45+Pipe250 + Elbow (45°) x 1**




Ø	130	150	180	200	230	250	300	350	400	450
H	810	818	826	835	842	856	869	873	880	893
V	440	450	456	460	467	472	480	486	493	502

**T45+Pipe500 + Elbow (45°) x 1**




Ø	130	150	180	200	230	250	300	350	400	450
H	985	995	1010	1016	1032	1042	1056	1068	1080	1100
V	613	620	629	635	642	661	673	680	685	701

**T45+Pipe1000 + Elbow (45°) x 1**

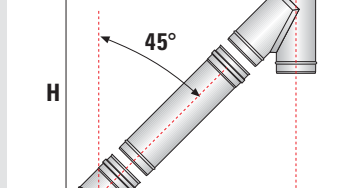


Ø	130	150	180	200	230	250	300	350	400	450
H	1350	1363	1376	1390	1405	1415	1425	1430	1440	1457
V	970	980	992	1005	1012	1023	1039	1047	1058	1068

**T45 + Elbow (45°) x 1**




Ø	130	150	180	200	230	250	300	350	400	450
H	660	672	683	695	705	714	722	733	740	754
V	272	280	286	298	309	317	322	334	341	358

**T45+Pipe250 + Elbow (45°) x 1**




Ø	130	150	180	200	230	250	300	350	400	450
H	760	768	776	785	792	806	819	823	830	843
V	405	415	421	425	432	437	445	451	458	467

**T45+Pipe500 + Elbow (45°) x 1**



Ø	130	150	180	200	230	250	300	350	400	450
H	975	985	1000	1006	1022	1032	1046	1058	1070	1090
V	578	585	594	600	607	626	638	645	650	666

**T45+Pipe1000 + Elbow (45°) x 1**

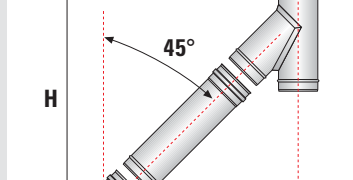

Ø	130	150	180	200	230	250	300	350	400	450
H	1340	1353	1366	1380	1395	1405	1415	1420	1430	1447
V	920	930	942	955	962	973	989	997	1008	1018



## MAIN FEATURES

- Easy and quick assembly.
- Suitable for internal applications.
- **Overlap** : 50 mm.
- **Welding type** : (TIG- Continues).
- **Thickness** : 0.40 mm – 1.50 mm.
- **Joining type** : male/female sockets.
- **Diameter** : from Ø 80 mm to 300 mm (other diameters available upon previous order).

## TECHNICAL CHARACTERISTICS

- **Operating mode** : Condensate (W) with gasket  
Dry (D) without gasket.
- **Pressure** : Positive (P1) with gasket  
Negative (N1) without gasket.
- **Max. working pressure** : 200 Pa
- **Operating Temperature** : 200 °C with gasket  
600°C without gasket
- **Material** : AISI 316L (1.4404) polished or mat finish  
AISI 304 (1.4301) polished finish
- **Fuel type** : Natural Gas/Wood / Light oil.

## APPLICATIONS

- Domestic heating and hot water systems.
- Industrial / commercial heating.
- Bakery furnace.
- Fire places.
- Ventilation and smoke extraction.

## CERTIFICATES


T160-N1-W-V2-L50 (040-150)-0300÷0600  
 T160-N1-D-V2-L50 (040-150)-G300÷G600  
 T200-P1-W-V2-L50 (040-150)-0150÷0300  
 T400-N1-D-V2-L50 (040-150)-G250÷G1000  
 T400-N1-W-V2-L50 (040-150)-0250÷01000  
 T600-N1-D-V2-L50 (040-150)-G250-G600  
 T450-N1-D-Vm-L20 (040-150)-G250




1020




# MODULES OVERVIEW

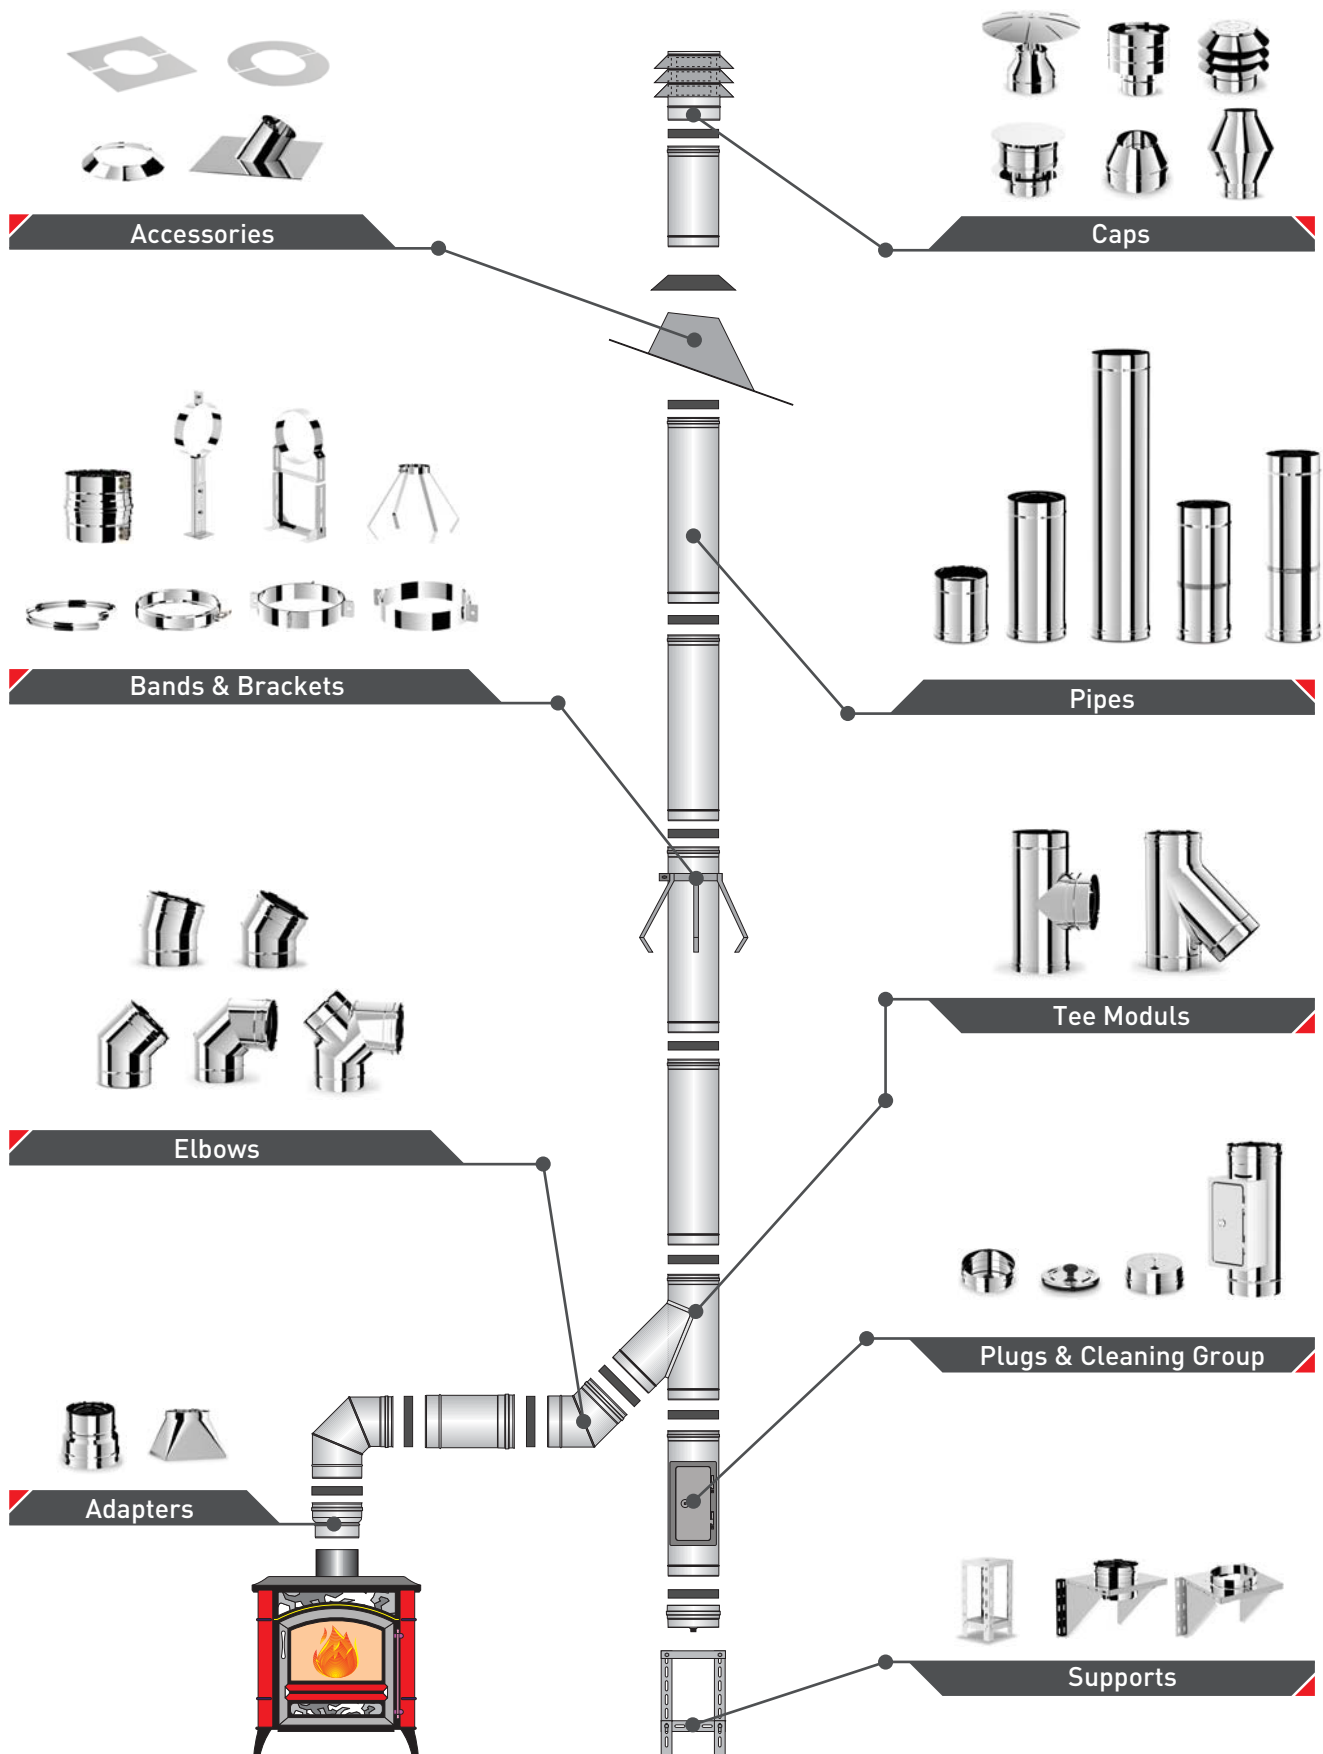




## SLXB250 Pipe 250 mm

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
H	200	200	200	200	200	200	200	200	200	200	200	200	200	200	200	200
m	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50

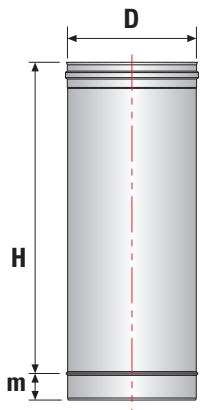

## SLXB500 Pipe 500 mm

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
H	450	450	450	450	450	450	450	450	450	450	450	450	450	450	450	450
m	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50

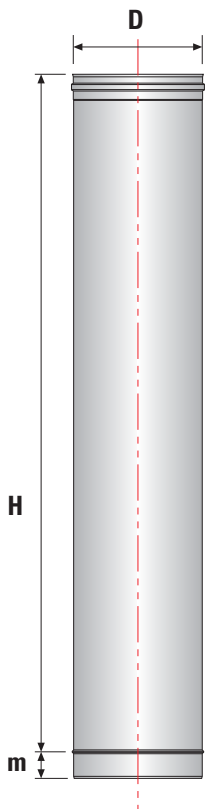


## SLXB1000 Pipe 1000 mm

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
H	950	950	950	950	950	950	950	950	950	950	950	950	950	950	950	950
m	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50


## SLXUB47 Adjustable Pipe 270-470 mm

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
Min	240	240	240	240	240	240	240	240	240	240	240	240	240	240	240	240
Max	420	420	420	420	420	420	420	420	420	420	420	420	420	420	420	420
m	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50

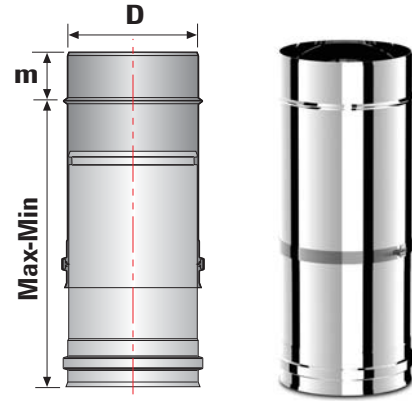

## SLXUB90 Adjustable Pipe 550-900 mm


D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
Min	490	490	490	490	490	490	490	490	490	490	490	490	490	490	490	490
Max	920	920	920	920	920	920	920	920	920	920	920	920	920	920	920	920
m	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50

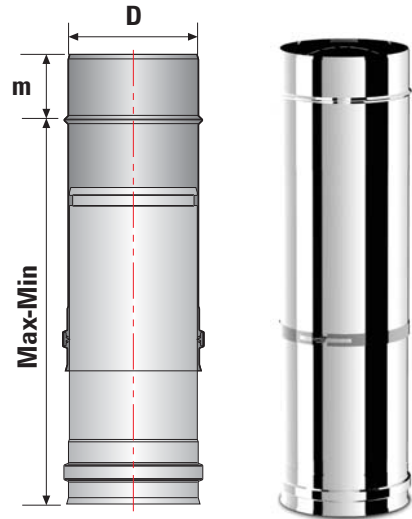

# ELBOWS


## SLXD15 15° Elbow

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
A	109	110	113	114	116	118	120	133	135	137	140	143	154	157	160	164
B	109	110	113	114	116	118	120	133	135	137	140	143	154	157	160	164
m	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50

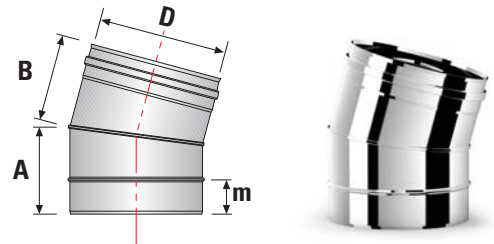


## SLXD30 30° Elbow

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
A	110	117	133	136	140	144	160	162	166	181	188	207	214	235	242	261
B	110	117	133	136	140	144	160	162	166	181	188	207	214	235	242	261
m	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50

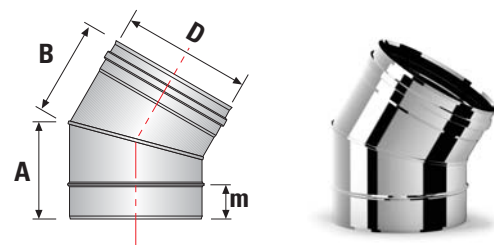







### SLXD45 45° Elbow

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
A	115	138	155	160	179	180	190	205	211	216	241	264	292	308	332	372
B	115	138	155	160	179	180	190	205	211	216	241	264	292	308	332	372
m	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50




### SLXD87 87° Elbow

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
A	110	123	135	150	165	170	187	187	212	217	235	255	277	300	317	342
B	112	146	173	189	214	222	255	270	280	312	353	395	437	479	520	560
C	110	123	135	150	165	170	187	187	212	217	235	255	277	300	317	342
m	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50



### SLXD90 90° Elbow

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
A	110	123	135	150	165	170	187	187	212	217	235	255	277	300	317	342
B	112	146	173	189	214	222	255	270	280	312	353	395	437	479	520	560
C	110	123	135	150	165	170	187	187	212	217	235	255	277	300	317	342
m	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50




### SLXD $\bar{i}$ 90 90° Elbow With Inspection

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
A	-	123	135	150	165	170	187	187	212	217	235	255	277	300	317	342
B	-	160	190	210	240	260	290	310	340	360	410	460	510	560	610	660
C	-	123	135	150	165	170	187	187	212	217	235	255	277	300	317	342
m	-	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50


## SLXT87 Tee 87°

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
H	200	283	350	350	350	350	450	450	450	450	550	550	650	650	700	950
B	105	135	150	160	175	185	200	210	225	235	270	295	320	345	395	420
m	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50

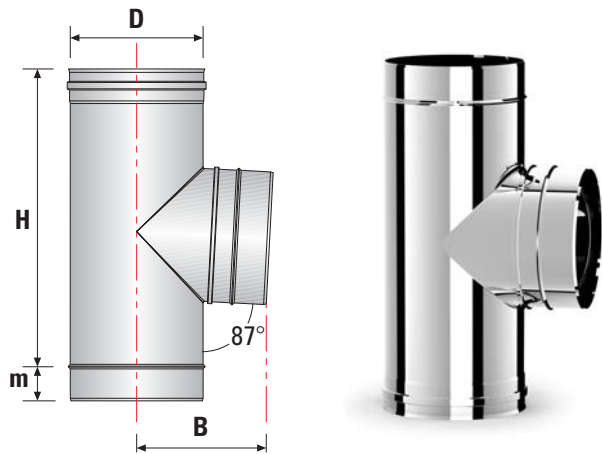


## SLXT90 Tee 90°

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
H	200	283	350	350	350	350	450	450	450	450	550	550	650	650	700	950
B	105	135	150	160	175	185	200	210	225	235	270	295	320	345	395	420
m	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50

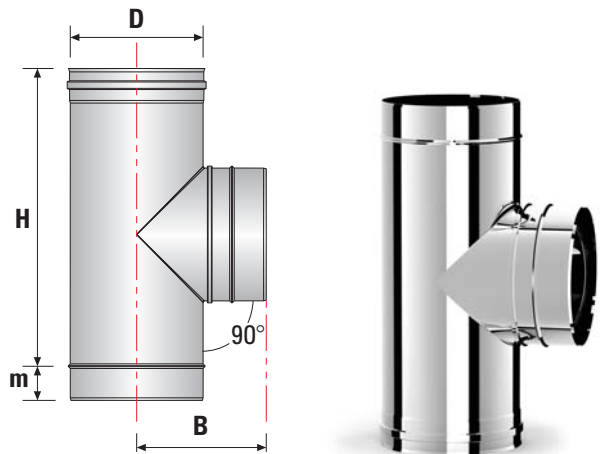


## SLXT135 Tee 135°


D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
H	-	283	283	350	450	450	550	550	-	650	650	950	950	950	999	1247
B	-	175	180	215	275	275	330	330	-	390	400	555	565	570	580	700
m	-	50	50	50	50	50	50	50	-	50	50	50	50	50	50	50

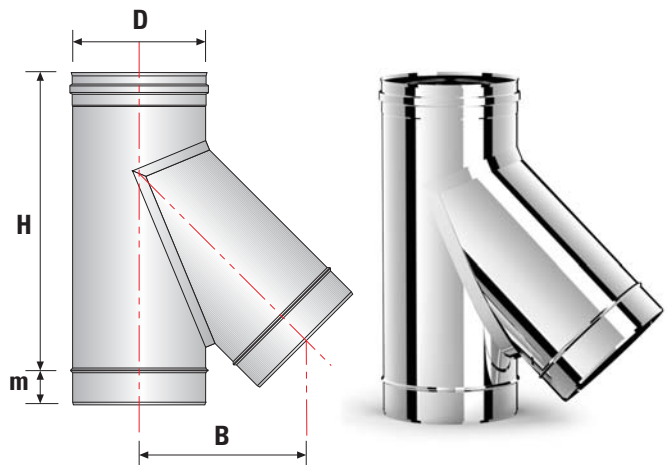

## SLXKT90 Tee 90° With reduced Juntion


D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
H	-	200	200	200	200	200	200	200	200	200	200	200	200	200	200	200
C	100															
m	-	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50

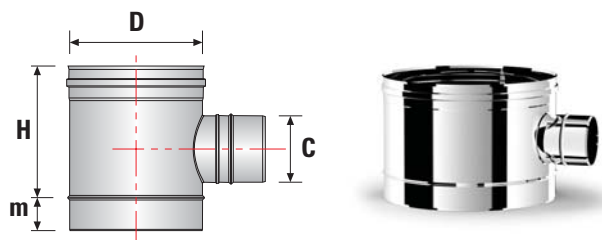

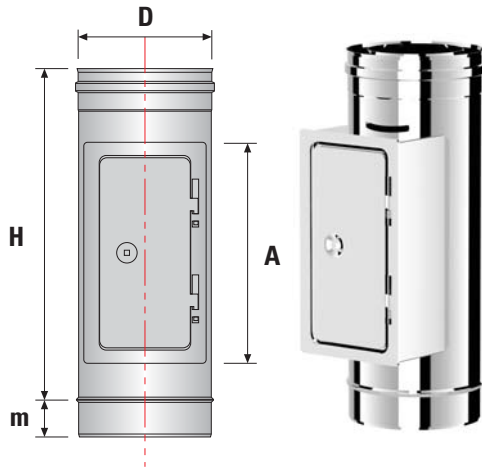


**SLXTKB Pipe With Inspection Door**

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
A	-	256	256	256	256	256	256	256	256	256	256	256	256	256	256	256
H	-	450	450	450	450	450	450	450	450	450	450	450	450	450	450	450
m	-	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50

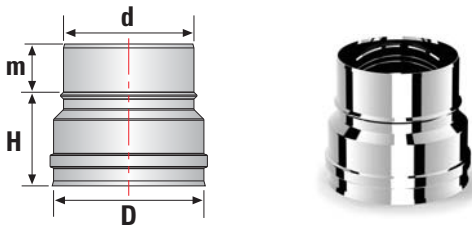

**SLXR Adaptor**

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
H	120	120	120	120	120	120	120	120	120	120	120	120	120	120	120	120
m	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50

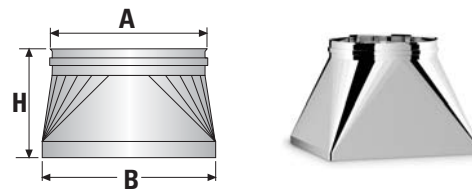

**SLXKR Square Adaptor**

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
H	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
B X B	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



**SLXDTK Tee Cap**

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
A	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80




**SLXCDTK Round Plug**

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
A	-	107	137	157	187	207	237	257	287	307	357	407	457	507	557	607




## SLXYT Tee Cap With Drain

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
A	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80




## SLXYT Cap with side drain

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
A	130	130	130	130	130	130	130	130	130	130	130	130	130	130	130	130




## SLXCOB250 2" Roof Test Pipe 250 mm

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
H	-	200	200	200	200	200	200	200	200	200	200	200	200	200	200	200
C	-	100														
m	-	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50




## SLXOB250 Test Unit 250 mm

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
H	200															
m	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50




## SLXOB500 Test Unit 500 mm


D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
H	450															
m	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50



## SLXOB1000 Test Unit 1000 mm


D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
H	950															
m	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50

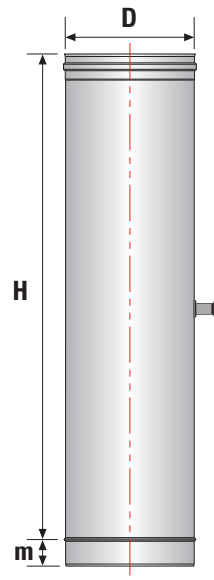

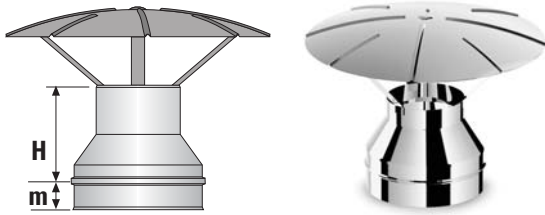


## SLXYKS Rain Cap

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
H	120	120	120	120	120	120	120	120	120	120	120	120	120	120	120	120
m	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50

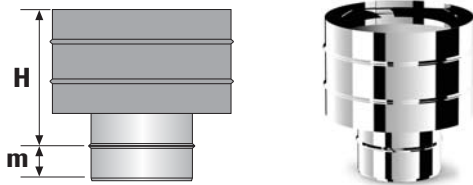


## SLXRKS Wind Cowl

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
H	200	200	200	200	200	250	250	250	250	250	250	250	250	250	250	250
m	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50

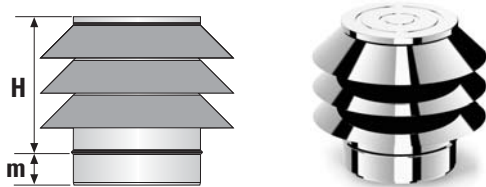


## SLXRKSL Anti-Wind Cowl

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
H	-	200	200	200	200	200	200	200	200	200	200	200	200	200	200	200
m	-	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50

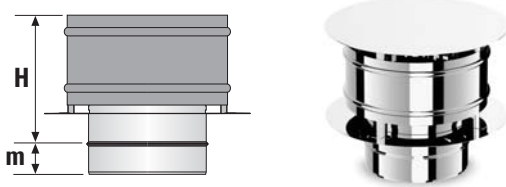


## SLXRKSS Wind Cowl S

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
H	-	200	200	200	200	250	250	250	250	250	250	250	250	250	250	250
m	-	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50




## SLXKS Open Terminal

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
H	140	140	140	140	140	140	140	140	140	170	170	170	170	170	170	170
m	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50

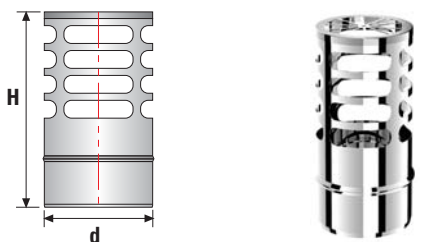

## SLXRBS Radiant Chimney Cap

D	80	100	130	-	-	-	-	-	-	-	-	-	-	-	-	-
H	200	200	200	-	-	-	-	-	-	-	-	-	-	-	-	-
m	50	50	50	-	-	-	-	-	-	-	-	-	-	-	-	-

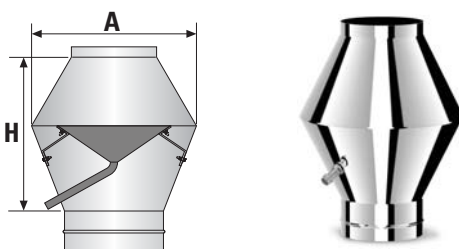


## SLXJC Deflector Cap

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
H	-	200	260	300	360	400	460	500	-	600	700	800	900	900	950	1000
A	-	175	225	260	315	350	400	440	-	525	600	650	700	750	800	850


## SLXTT Base Support

D	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
A	130	150	180	150	180	200	230	250	300	350	400	450	500	550	600
B	360	360	360	360	360	360	360	360	360	360	360	360	360	360	360

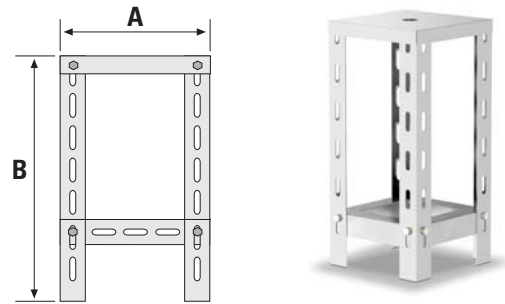


## SLXBTS Wall Support

D	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
A	140	160	190	210	240	260	290	310	360	410	460	510	560	610	660
B	180	200	230	250	280	300	330	350	400	450	500	550	600	650	700
H	140	160	190	210	240	260	290	310	360	410	460	510	560	610	660

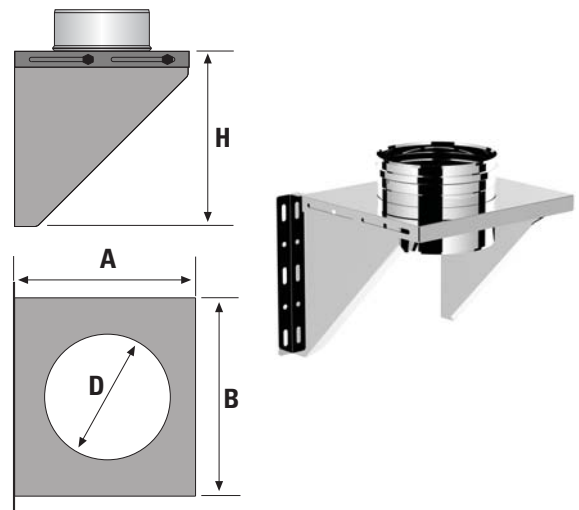


## SLXKTS Wall Support With Clamp

D	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
A	150	170	200	220	250	270	300	320	370	420	470	520	570	620	670
B	180	200	230	250	280	300	330	350	400	450	500	550	600	650	700
H	150	170	200	220	250	270	300	320	370	420	470	520	570	620	670

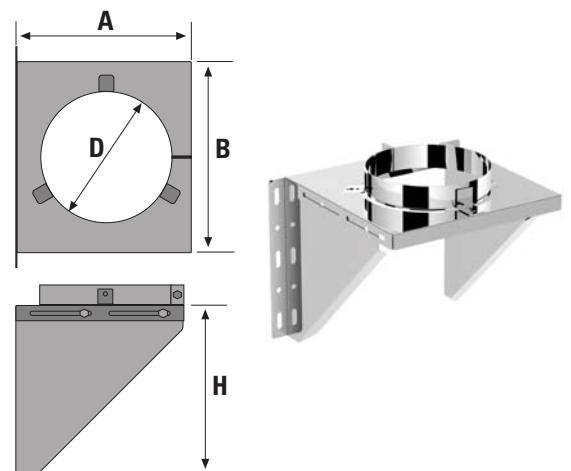







## SLXDSKE Wall Bracket

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
A	105	130	160	175	205	225	255	276	280	300	329	380	430	480	508	536
X	55-75 60 mm															




## SLXDSKE11 Wall Bracket Eko 11

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
A	105	133	163	178	208	228	258	279	283	303	332	383	433	483	511	539
X	55-75 70 - 110 mm															




## SLXDSKE21 Wall Bracket Eko 21

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
A	-	133	163	178	208	228	258	279	-	-	-	-	-	-	-	-
X	- 120 - 210 mm															




## SLXGK Guy Wire Bracket

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
---	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----



## SLXAK Hold-Down Clamp

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
---	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----




## SLXCOB Storm Collar

D	100	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	190	210	240	260	290	310	370	390	420	440	490	540	590	640	690	740	790
C	80	80	80	80	80	80	80	80	100	100	100	100	100	100	100	100	100


## SLXHT Adjustable Support

d	100	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
C	200 - 300 - 400 - 500 - 600 mm															




## SLXHTU Long Adjustable Support

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
C	610 - 1000 mm															




## SLXBK Locking Band

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
A	47 mm															




## SLXBK<sub>i</sub> Locking Band


D	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
A	17 mm										-	-	-	-	-



## SLXBKT Structural Locking Band


D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
A	200 mm															

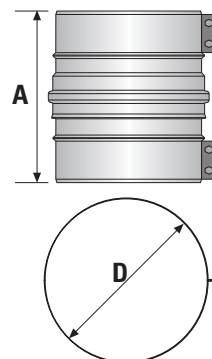

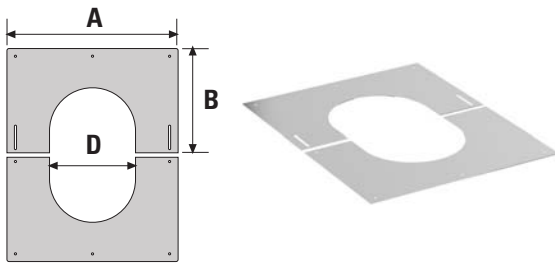


**SLXDK30 Wall Plate 30**

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	280	300	330	350	380	400	430	450	480	500	550	600	650	-	-	-	-
B	145	160	175	190	205	220	235	250	265	280	310	335	360	-	-	-	-

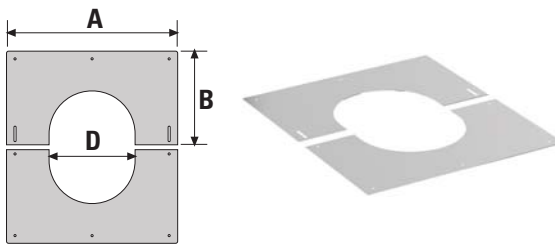


**SLXDK45 Wall Plate 45**

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	280	300	330	350	380	400	430	450	480	500	550	600	650	-	-	-	-
B	155	175	195	210	230	245	270	280	300	320	350	410	460	-	-	-	-

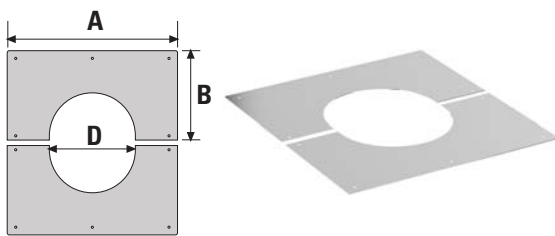


**SLXDK90 Wall Plate 90**

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	280	300	330	350	380	400	430	450	480	500	550	600	650	-	-	-	-
B	140	160	175	185	200	210	225	235	250	260	285	310	335	-	-	-	-

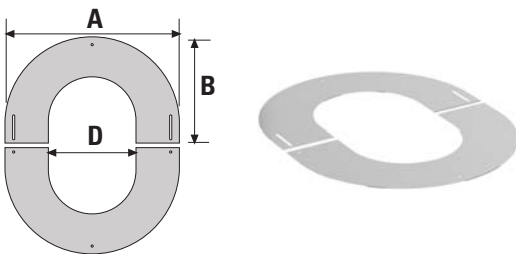


**SLXOK30 Oval Wall Plate 30**

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	280	300	330	350	380	400	430	450	480	500	550	600	650	-	-	-	-
B	150	170	185	198	215	227	244	255	273	285	313	340	370	-	-	-	-

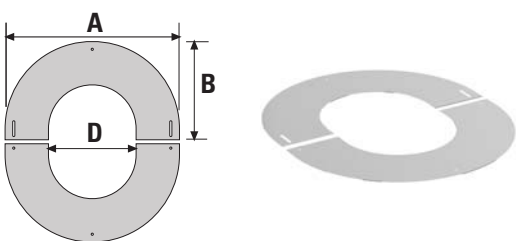

**SLXOK45 Oval Wall Plate 45**

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	280	300	330	350	380	400	430	450	480	500	550	600	650	-	-	-	-
B	175	190	205	218	239	253	274	288	310	324	359	385	420	-	-	-	-

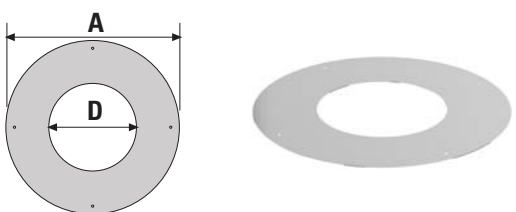


**SLXOK90 Oval Wall Plate 90**

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	280	300	330	350	380	400	430	450	480	500	550	600	650	-	-	-	-




## SLXHK Distance Clamp

d	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600
---	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

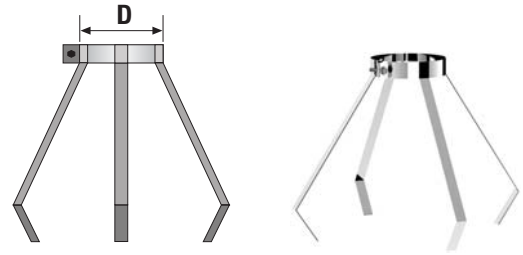


## SLXC030 Flashing 5-30

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	-	550	580	600	630	660	690	710	740	770	820	880	930	980	-	-	-
B	-	530	560	580	610	640	670	690	720	750	800	860	910	960	-	-	-
H	-	150	150	150	150	150	150	150	150	150	150	150	150	150	-	-	-
C	-	130	160	195	230	255	290	310	345	370	425	485	540	600	-	-	-

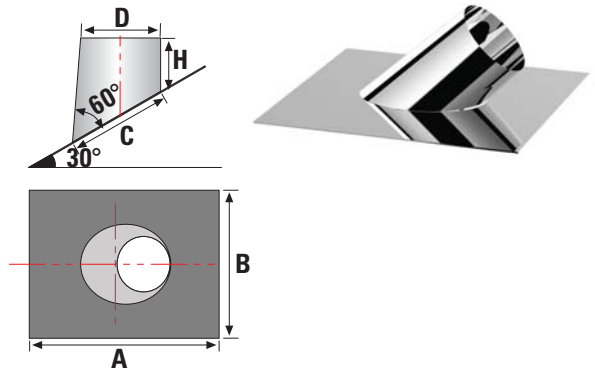


## SLXC045 Flashing 40-45


D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	-	555	595	640	680	710	750	780	825	850	920	960	1000	1100	-	-	-
B	-	535	575	620	660	690	730	760	805	830	900	940	980	1080	-	-	-
H	-	150	150	150	150	150	150	150	150	150	150	150	150	150	-	-	-
C	-	155	195	240	280	310	350	380	425	450	520	590	665	735	-	-	-

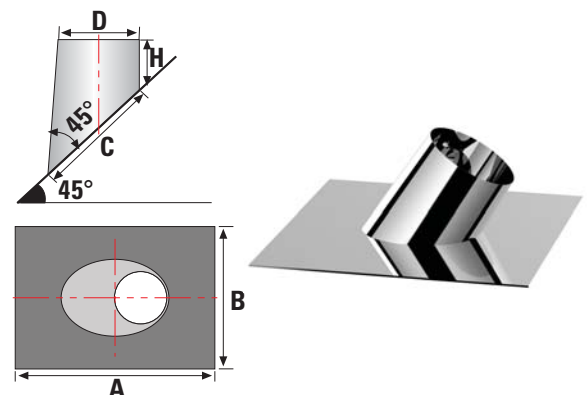



## SLXC090 Flashing 90

D	80	100	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	-	560	590	610	640	660	690	710	740	760	810	860	910	960	-	-	-
B	-	560	590	610	640	660	690	710	740	760	810	860	910	960	-	-	-
H	-	150	150	150	150	150	150	150	150	150	150	150	150	150	-	-	-
C	-	160	190	210	240	260	290	310	340	360	410	460	510	560	-	-	-

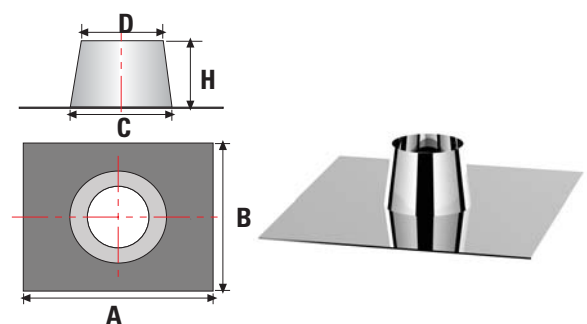

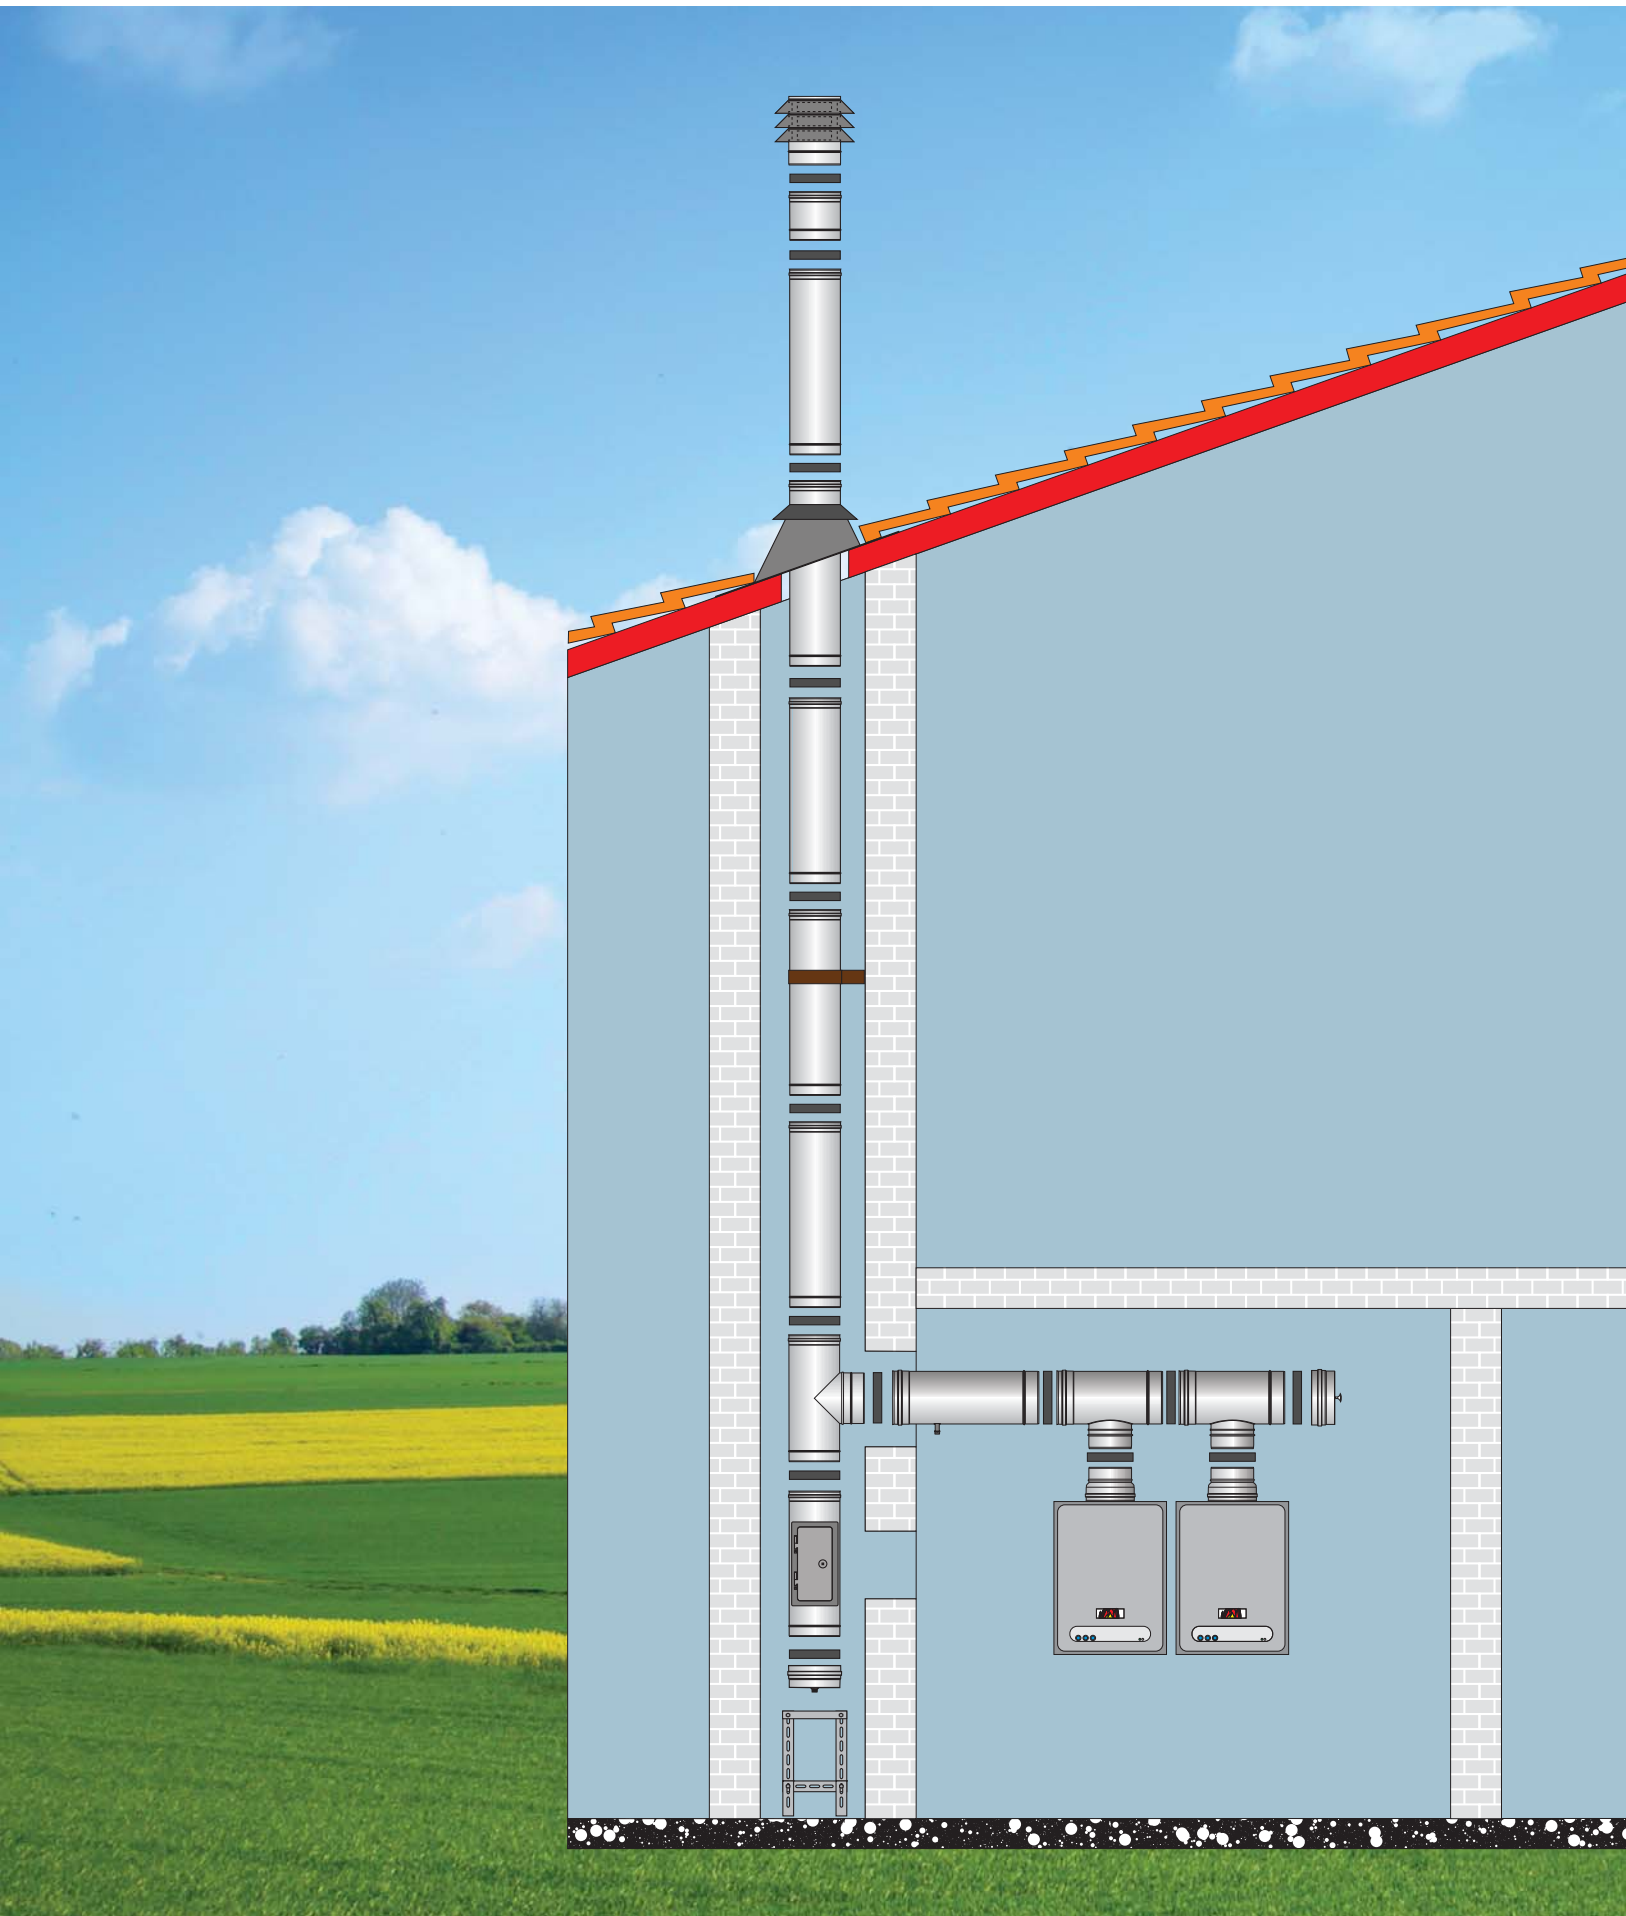

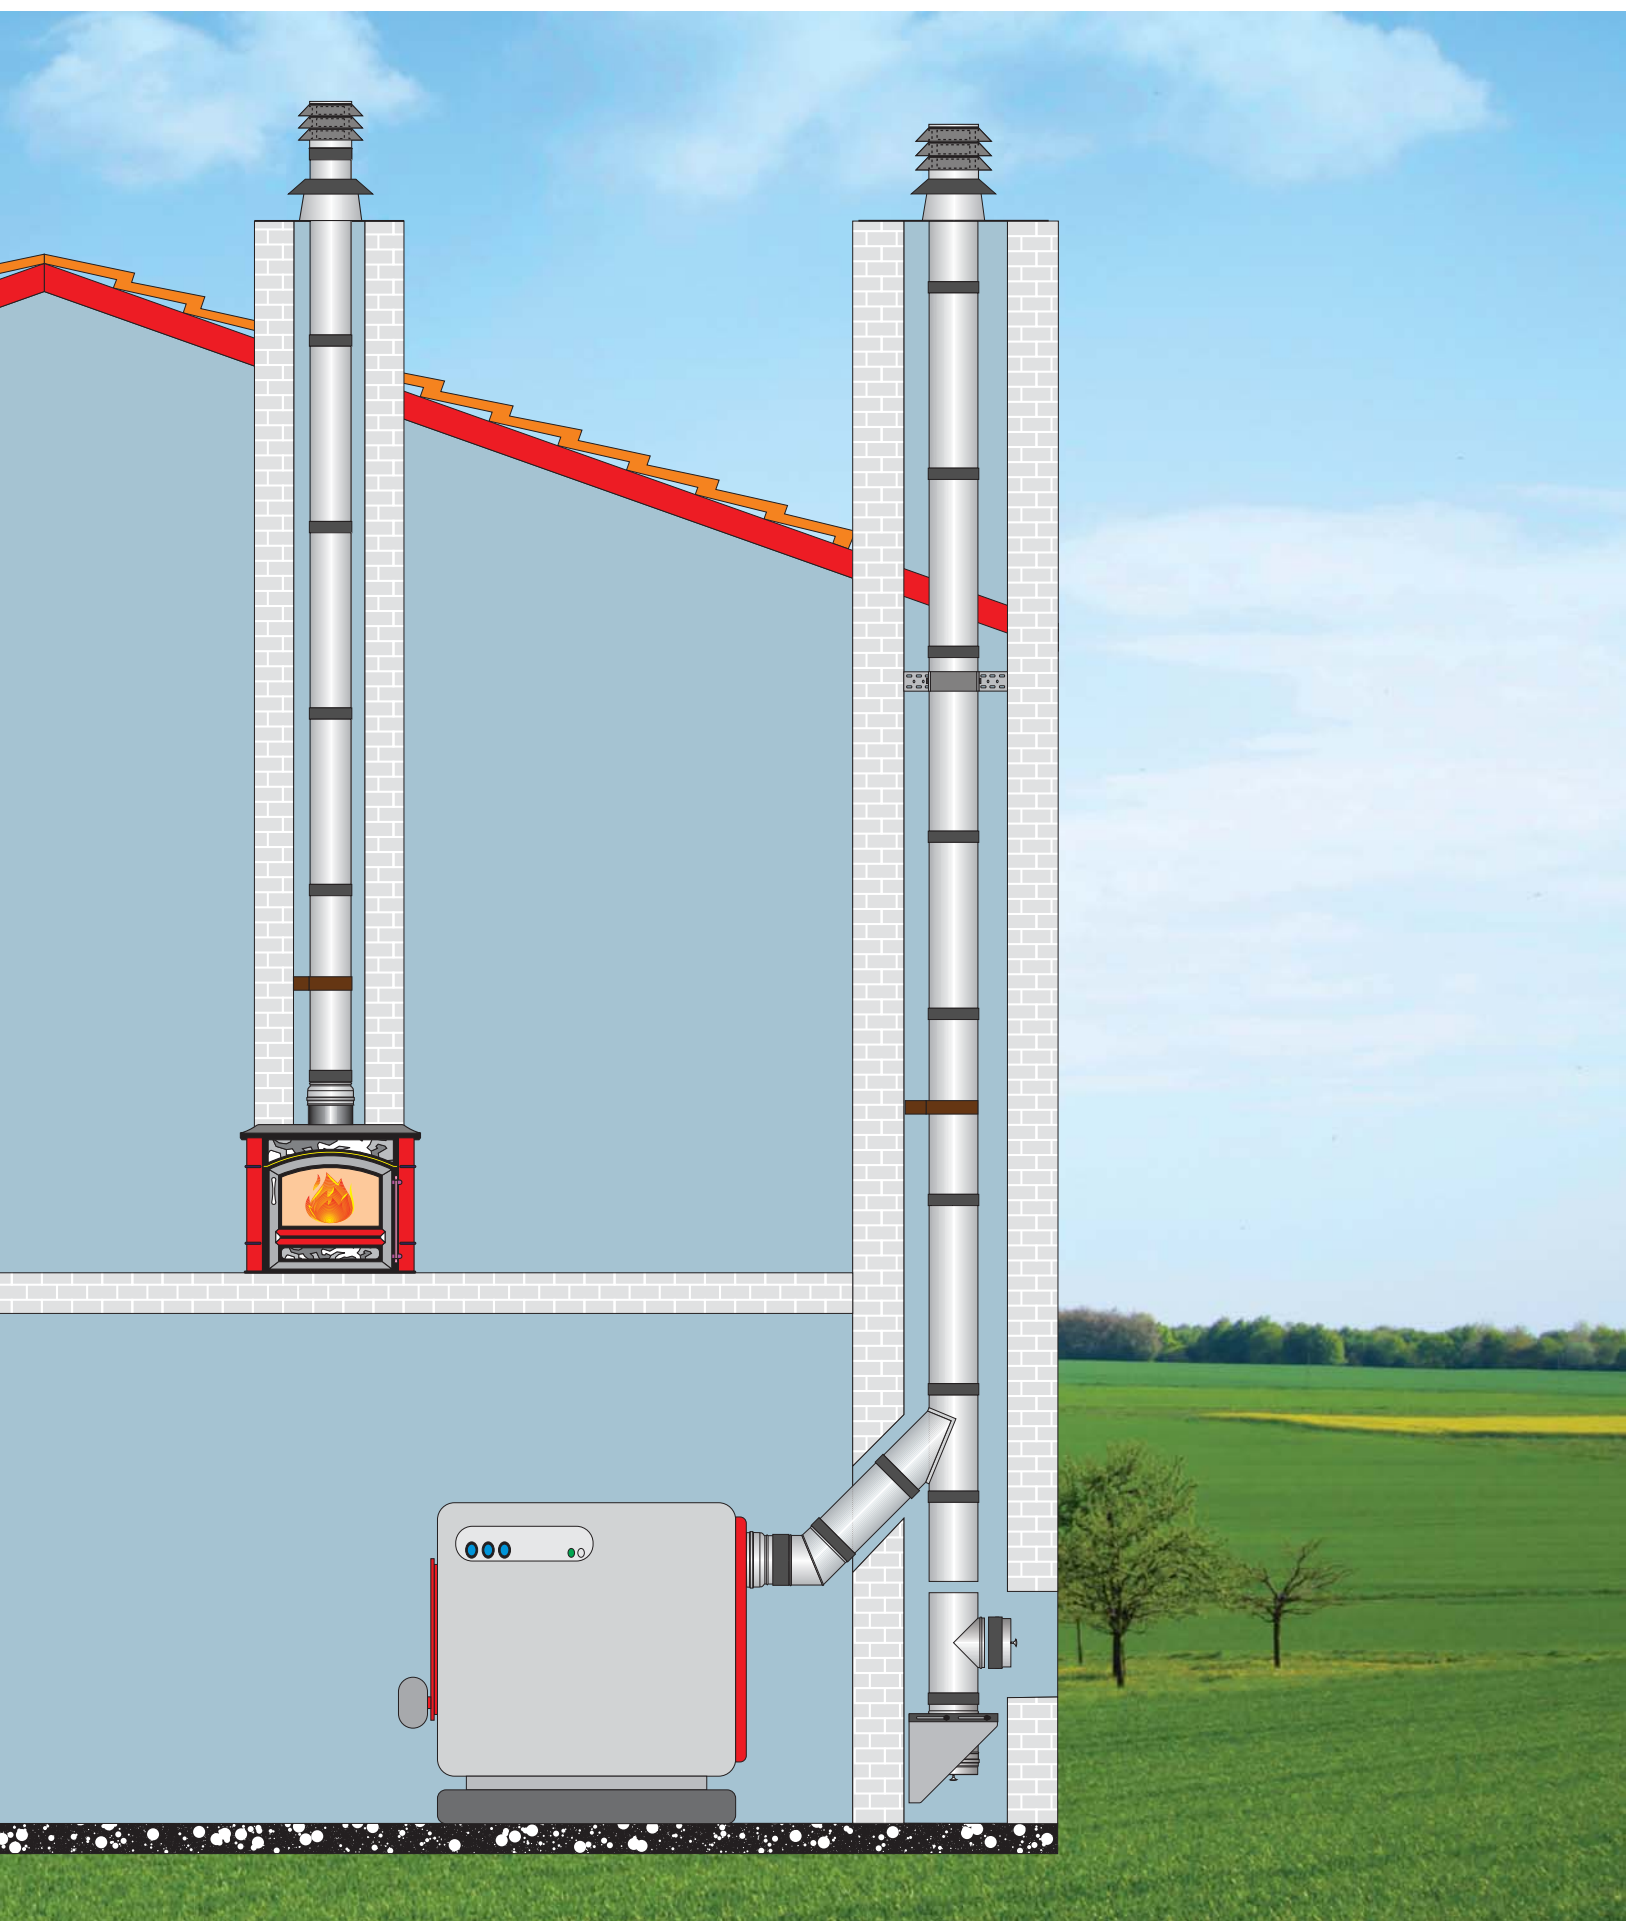

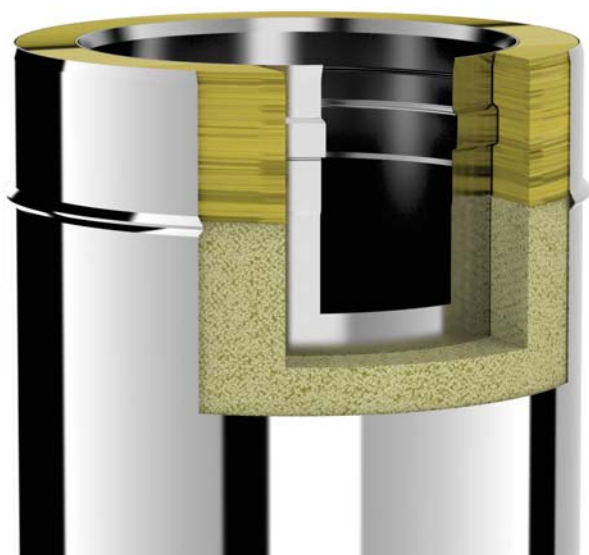

## MAIN FEATURES

- Easy and quick assembly.
- Suitable for internal & external applications.
- High density rock-wool insulation.
- **Overlap** : 50 mm.
- **Welding type** : (TIG- Continues).
- **Thickness** : 0.40 mm – 1.50 mm.
- **Joining type** : male/female sockets.
- **Diameter** : from Ø 80 mm to 300 mm (other diameters available upon previous order).

## TECHNICAL CHARACTERISTICS

- **Operating mode** : Condensate (W) with gasket  
Dry (D) without gasket.
- **Pressure** : Positive (P1) with gasket  
Negative (N1) without gasket.
- **Max. working pressure** : 200 Pa
- **Operating Temperature** : 200 °C with gasket  
600°C without gasket
- **Material** : AISI 316L (1.4404) polished or mat finish  
AISI 304 (1.4301) polished finish
- **Fuel type** : Natural Gas/Wood / Light oil.

## APPLICATIONS

- Domestic heating and hot water systems.
- Industrial / commercial heating.
- Bakery furnace.
- Fire places.

## CERTIFICATES


T200-P1-W-V2-L50 (040-150)-O100÷O600  
 T400-N1-W-V2-L50 (040-150)-O100÷O400  
 T400-N1-D- V2-L50 (040-150)-G100÷G400  
 T600-N1-D- V2-L50 (040-150)-G50  
 T600-N1-D-Vm-L20 (040-150)-G100




1020




# MODULES OVERVIEW

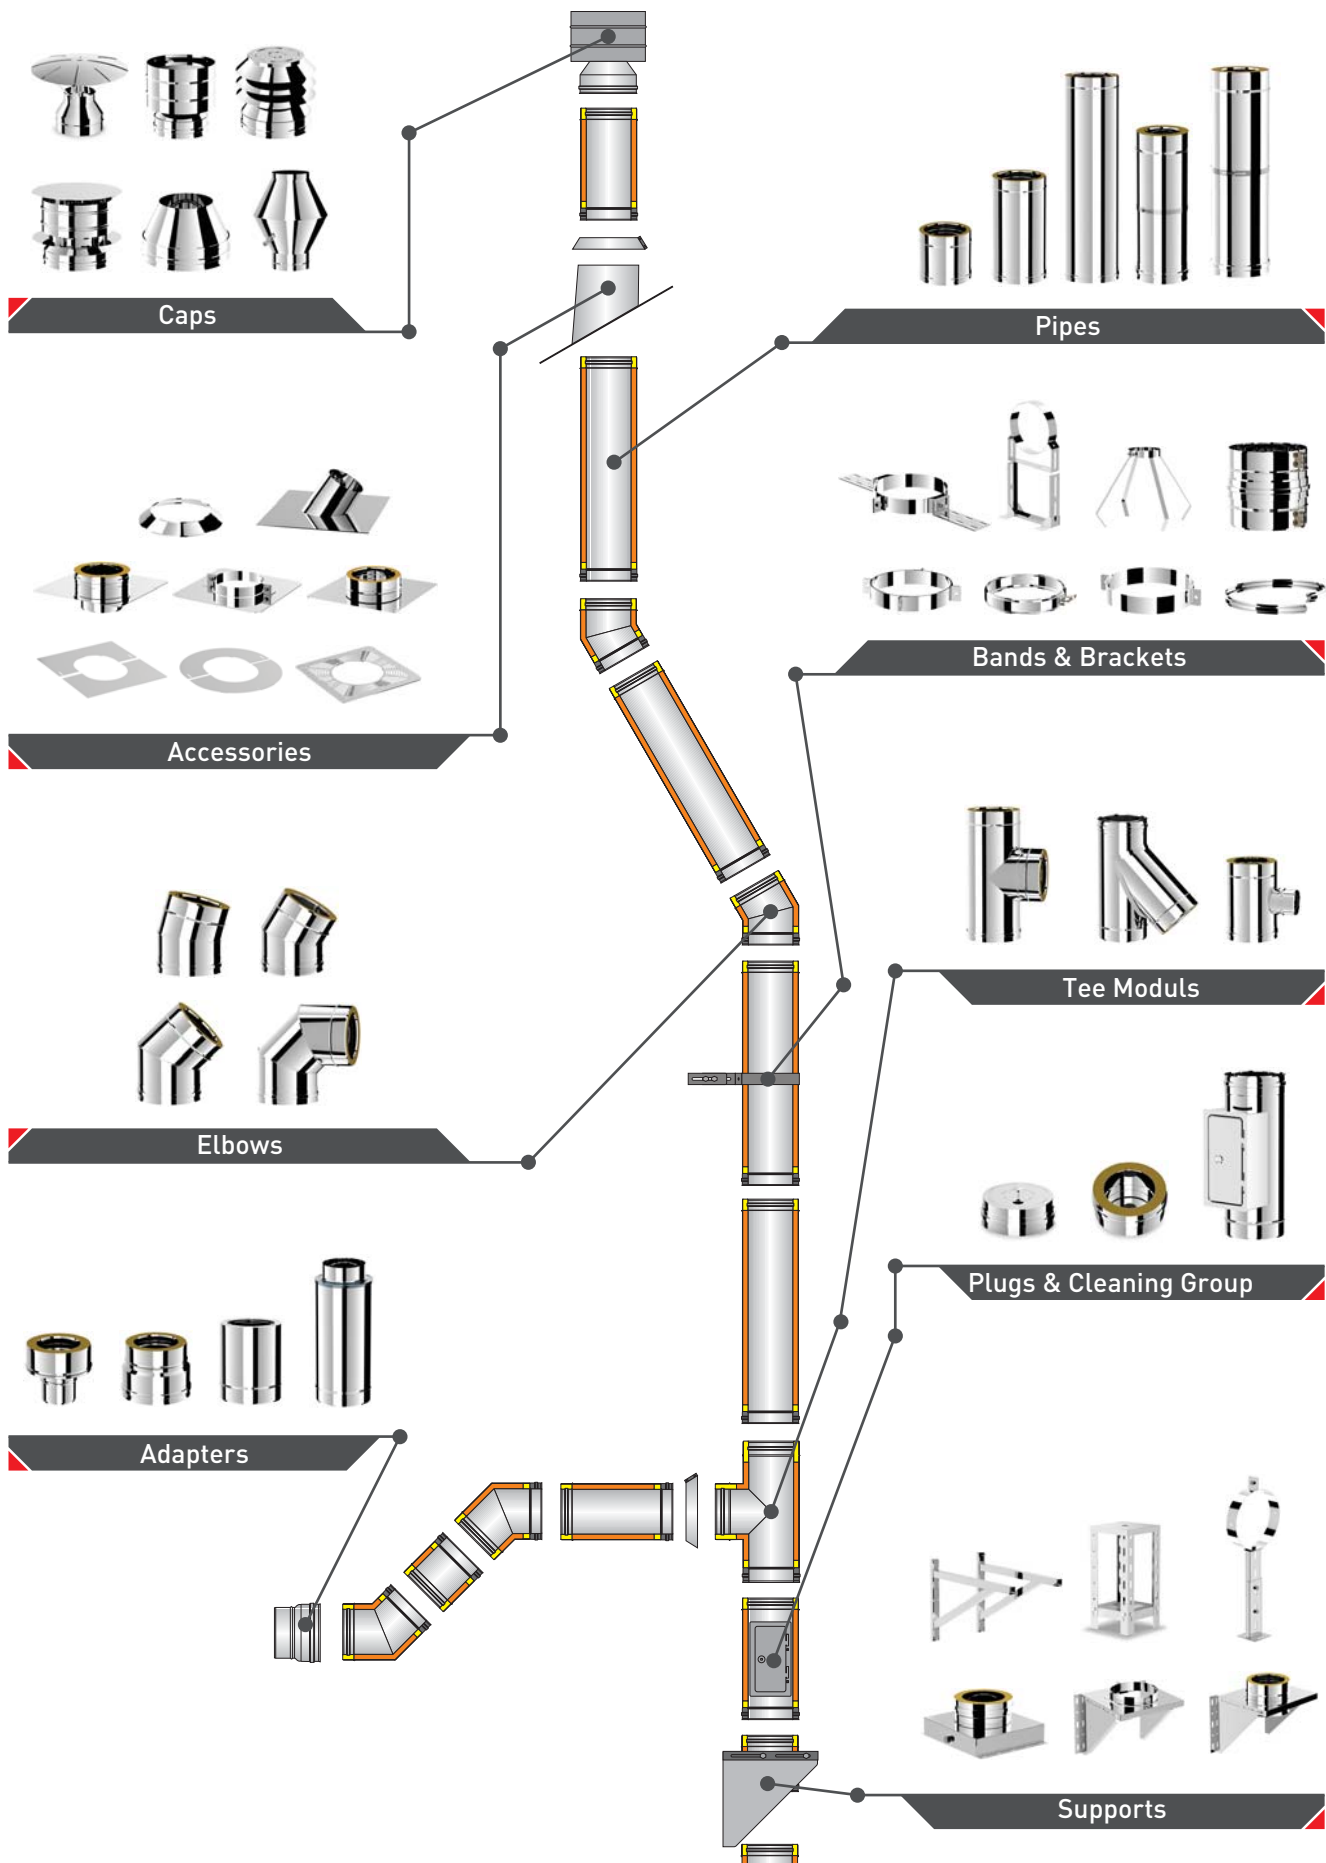




**SLXAB250 Pipe 250 mm**

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
H	200	200	200	200	200	200	200	200	200	200	200	200	200	200	200
m	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50

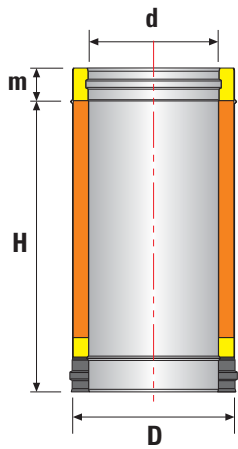

**SLXAB500 Pipe 500 mm**

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
H	450	450	450	450	450	450	450	450	450	450	450	450	450	450	450
m	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50

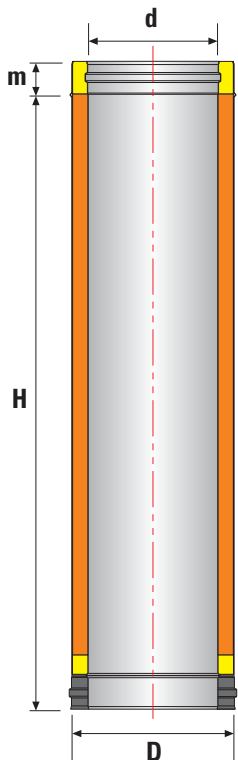


**SLXAB100 Pipe 1000 mm**

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
H	950	950	950	950	950	950	950	950	950	950	950	950	950	950	950
m	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50


## SLXAUB47 Adjustable Pipe 270-470 mm

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
Min	240	240	240	240	240	240	240	240	240	240	240	240	240	240	240
Max	420	420	420	420	420	420	420	420	420	420	420	420	420	420	420
m	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50

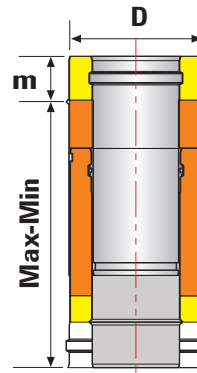


## SLXAUB90 Adjustable Pipe 550-900 mm

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
Min	490	490	490	490	490	490	490	490	490	490	490	490	490	490	490
Max	920	920	920	920	920	920	920	920	920	920	920	920	920	920	920
m	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50

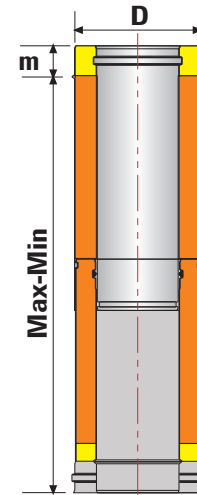


## SLXABB500 Starter Pipe 500 mm


d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
H	450	450	450	450	450	450	450	450	450	-	-	-	-	-	-
m	50	50	50	50	50	50	50	50	50	-	-	-	-	-	-

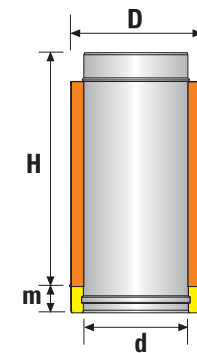

## SLXABB1000 Starter Pipe 1000 mm


d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
H	950	950	950	950	950	950	950	950	950	-	-	-	-	-	-
m	50	50	50	50	50	50	50	50	50	-	-	-	-	-	-

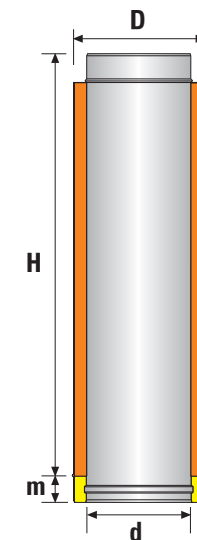




### SLXAD15 15° Elbow

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	110	114	116	118	120	121	123	136	140	143	146	157	161	164	167
B	110	114	116	118	120	121	123	136	140	143	146	157	161	164	167
m	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50




### SLXAD30 30° Elbow

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	117	125	140	143	148	150	165	170	189	195	215	222	243	250	269
B	117	125	140	143	148	150	165	170	189	195	215	222	243	250	269
m	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50




### SLXAD45 45° Elbow

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	138	148	167	170	190	194	200	217	227	253	275	303	319	344	384
B	138	148	167	170	190	194	200	217	227	253	275	303	319	344	384
m	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50



### SLXAD87 87° Elbow

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	123	133	147	160	177	178	198	198	228	246	265	287	312	327	352
B	146	168	194	210	235	250	275	292	333	374	417	459	500	540	583
C	123	133	147	160	177	178	198	198	228	246	265	287	312	327	352
m	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50




### SLXAD90 90° Elbow

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	123	133	147	160	177	178	198	198	228	246	265	287	312	327	352
B	146	168	194	210	235	250	275	292	333	374	417	459	500	540	583
C	123	133	147	160	177	178	198	198	228	246	265	287	312	327	352
m	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50




## SLXAT87 Tee 87°

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
H	283	350	350	450	450	450	450	450	550	550	650	700	700	950	950
B	150	160	175	185	200	210	225	235	260	295	320	345	370	420	445
m	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50

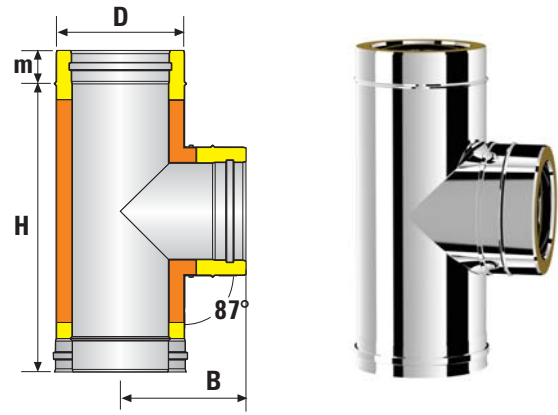


## SLXAT90 Tee 90°

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
H	283	350	350	450	450	450	450	450	550	550	650	700	700	950	950
B	150	160	175	185	200	210	225	235	260	295	320	345	370	420	445
m	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50

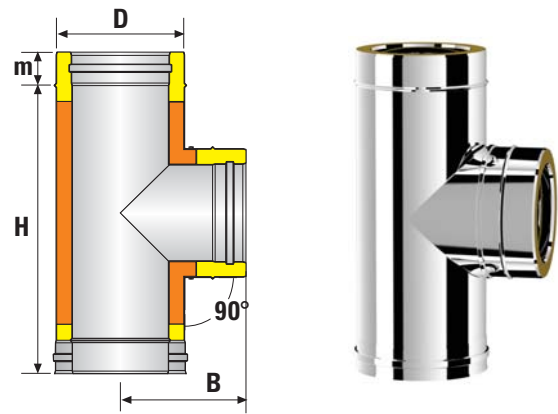


## SLXAT135 Tee 135°


d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
H	-	350	450	450	550	550	550	650	650	950	950	950	950	1200	1200
B	-	210	265	270	325	325	335	385	390	550	555	565	580	705	705
m	-	50	50	50	50	50	50	50	50	50	50	50	50	50	50

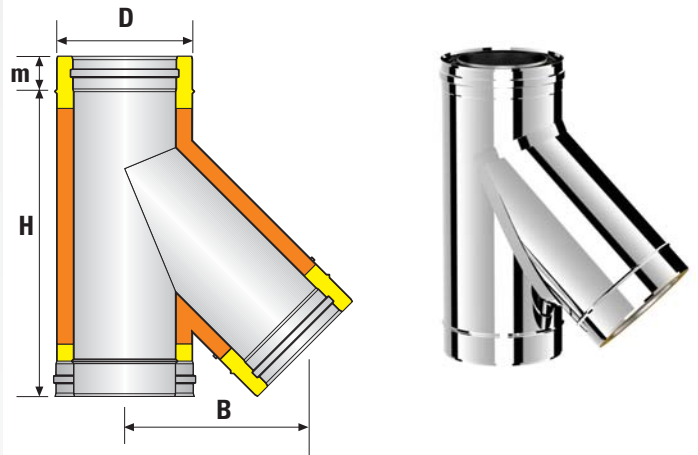

## SLXAT135L Tee 135° Long


d	80	100	130	150	180	200	-	-	-	-	-	-	-	-	-
D	130	150	180	200	230	250	-	-	-	-	-	-	-	-	-
H	-	350	450	450	550	550	-	-	-	-	-	-	-	-	-
m	-	50	50	50	50	50	-	-	-	-	-	-	-	-	-
B	-	870	900	920	950	970	-	-	-	-	-	-	-	-	-
E	-	720	720	720	720	720	-	-	-	-	-	-	-	-	-
G	-	510	510	510	510	510	-	-	-	-	-	-	-	-	-

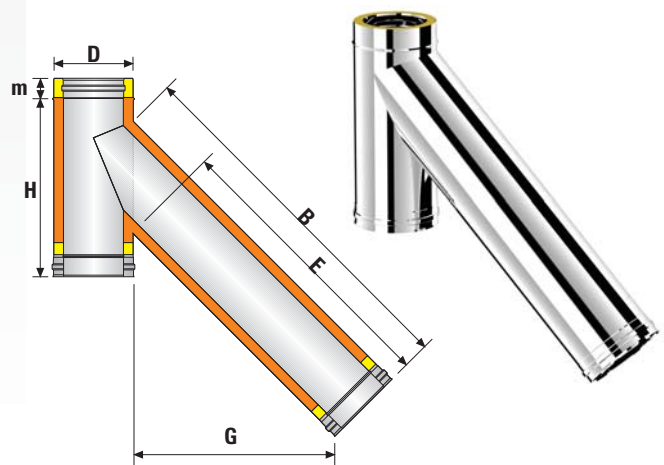

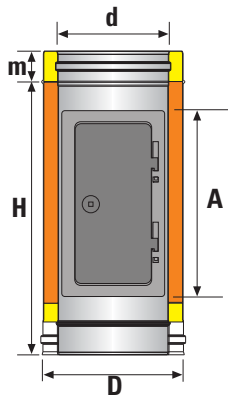


### SLXATKB Pipe With Inspection Door

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	-	256	256	256	256	256	256	256	256	256	256	256	256	256	256
H	-	450	450	450	450	450	450	450	450	450	450	450	450	450	450
m	-	50	50	50	50	50	50	50	50	50	50	50	50	50	50




### SLXANB Nisbus

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
H	-	200	200	200	200	200	200	200	200	200	200	200	200	200	200
m	-	50	50	50	50	50	50	50	50	50	50	50	50	50	50




### SLXACCR DW to DW Adaptor

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
H	-	170	170	170	200	200	200	200	200	200	200	200	200	200	200
m	-	50	50	50	50	50	50	50	50	50	50	50	50	50	50





### SLXATCR SW to DW Adaptor

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
H	170	170	170	170	170	170	170	170	200	200	200	200	200	200	200
m	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50



### SLXADTK Tee Cap

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80




### SLXAYT Tee Cap With Drain

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80


## SLXA0B250 Test Unit 250 mm

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
H	200	200	200	200	200	200	200	200	200	200	200	200	200	200	200
m	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50

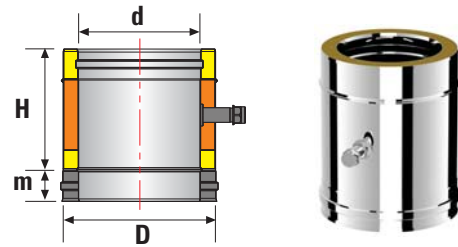


## SLXA0B500 Test Unit 500 mm

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
H	450	450	450	450	450	450	450	450	450	450	450	450	450	450	450
m	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50

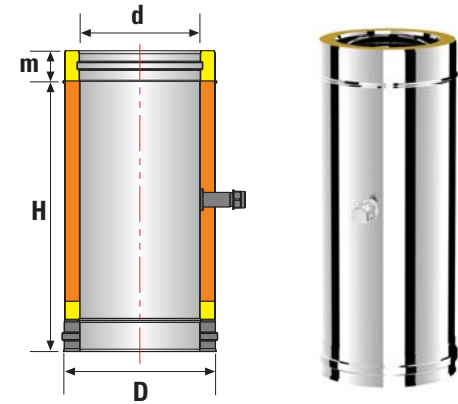


## SLXA0B1000 Test Unit 1000 mm


d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
H	950	950	950	950	950	950	950	950	950	950	950	950	950	950	950
m	50	50	50	50	50	50	50	50	50	50	50	50	50	50	50

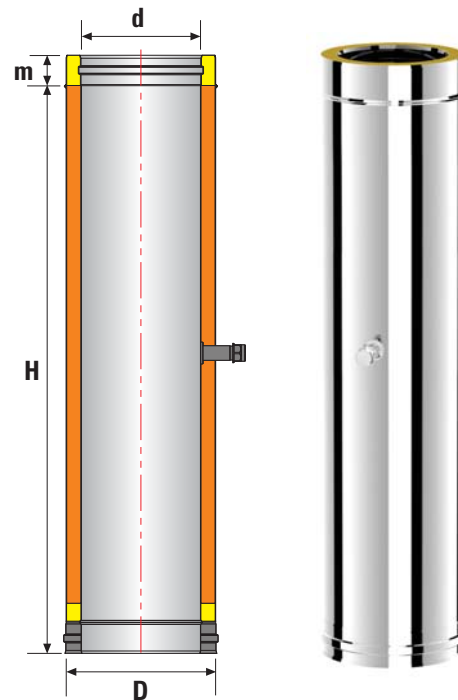

## SLXAC0B250 2" Roof Test Pipe 250 mm


d	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	150	180	200	230	250	280	300	350	400	450	500	550	600	650
H	200	200	200	200	200	200	200	200	200	200	200	200	200	200
C	100	100	100	100	100	100	100	100	100	100	100	100	100	100
M	50	50	50	50	50	50	50	50	50	50	50	50	50	50

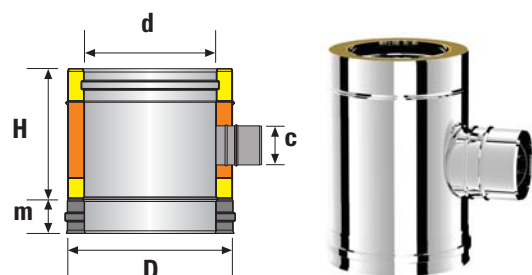

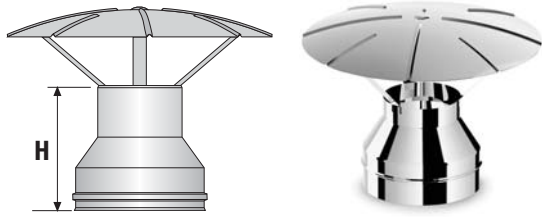


### SLXAYKS Rain Cap

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
H	170	170	170	170	170	170	170	170	170	-	-	-	-	-	-

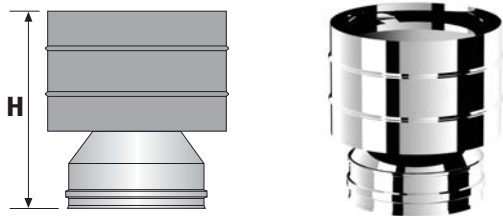


### SLXARKS Wind Cowl

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
H	250	250	250	250	250	300	300	300	300	-	-	-	-	-	-

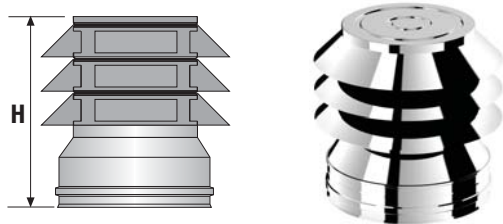


### SLXARKSL Anti-Wind Cowl

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
H	-	330	330	330	330	330	330	330	330	-	-	-	-	-	-

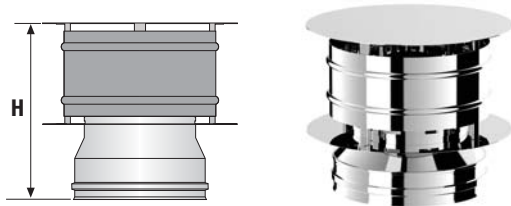


### SLXARKSS Wind Cowl S

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
H	250	250	250	250	250	300	300	300	300	-	-	-	-	-	-

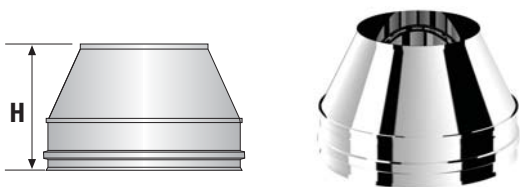

### SLXAKS Open Terminal

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
H	200	200	200	200	200	250	250	250	250	250	250	300	300	300	300

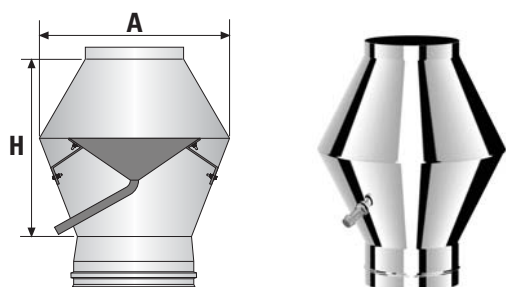


### SLXAJC Deflector Cap

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
H	-	300	360	400	460	500	550	600	700	800	900	900	950	1000	1050
A	-	260	315	350	400	440	480	525	600	650	700	750	800	850	900



## SLXATT Base Support

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
B	360	360	360	360	360	360	360	360	360	360	360	360	360	360	360




## SLXABTS Wall Support

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	190	210	240	260	290	310	340	360	410	460	510	560	610	660	710
B	250	270	300	320	350	370	400	420	470	520	570	620	670	720	770
H	190	210	240	260	290	310	340	360	410	460	510	560	610	660	710




## SLXAKTS Wall Support With Clamp

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	200	220	250	270	300	320	350	370	420	470	520	570	620	670	720
B	250	270	300	320	350	370	400	420	470	520	570	620	670	720	770
H	200	220	250	270	300	320	350	370	420	470	520	570	620	670	720




## SLXATA20 Extension Bracket Set 20

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600	
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650	
A	-	320	320	320	335	335	-	350	364	378	-	-	-	-	-	
B	-	430	430	430	500	500	-	530	600	650	-	-	-	-	-	
X	-	50 - 200 mm														




## SLXATA30 Extension Bracket Set 30

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600	
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650	
A	-	378	378	378	393	393	-	407	420	436	-	-	-	-	-	
B	-	530	530	530	600	600	-	650	700	750	-	-	-	-	-	
X	-	50 - 300 mm														




## SLXATA40 Extension Bracket Set 40

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600	
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650	
A	-	436	436	436	450	450	-	465	480	494	-	-	-	-	-	
B	-	630	630	630	700	700	-	750	800	850	-	-	-	-	-	
X	-	50 - 400 mm														






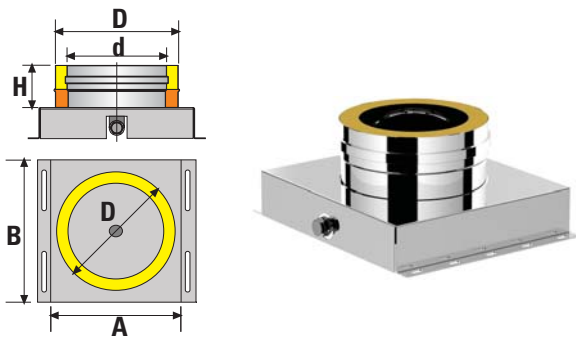


## SLXAYTTBase Support With Drain

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	230	250	280	300	330	350	380	400	450	500	550	600	650	700	750
B	180	200	230	250	280	300	330	350	400	450	500	550	600	650	700
H	80 mm														

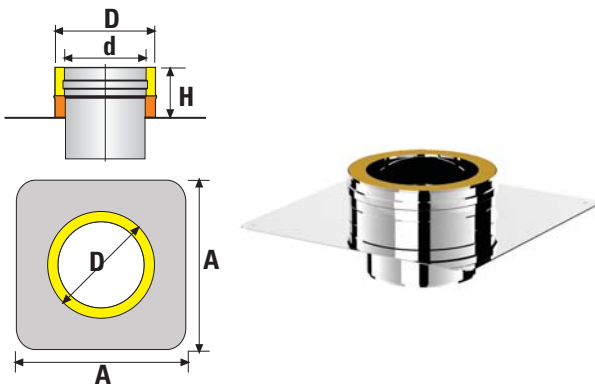


## SLXAUD Outlet Plate

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	320	340	370	390	420	440	470	490	540	590	-	-	-	-	-
A	320	340	370	390	420	440	470	490	540	590	-	-	-	-	-
H	70 mm														

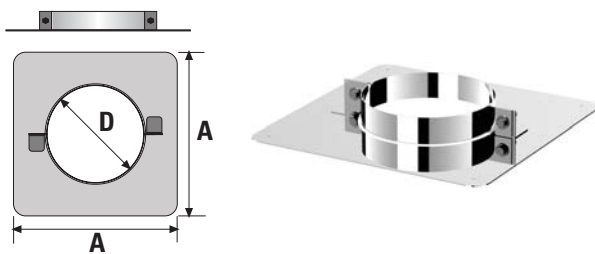


## SLXAKD Tile Plate

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	320	340	370	390	420	440	470	490	540	590	-	-	-	-	-
A	320	340	370	390	420	440	470	490	540	590	-	-	-	-	-

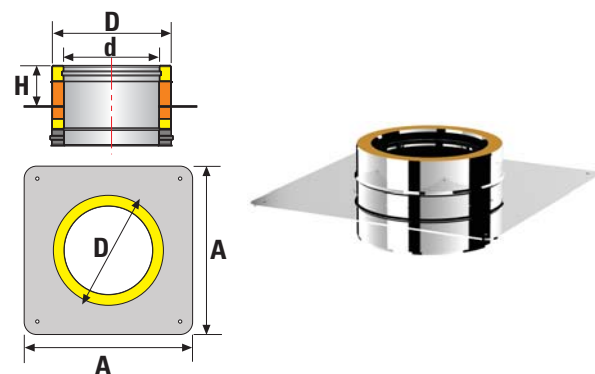

## SLXAOD Anchor Plate

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	320	340	370	390	420	440	470	490	540	590	-	-	-	-	-
A	320	340	370	390	420	440	470	490	540	590	-	-	-	-	-
H	70 mm														

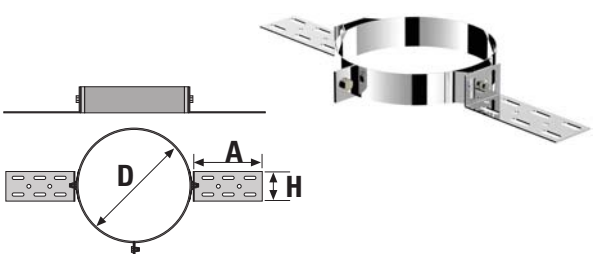


## SLXAUK Rafter Support

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D130	150	180	200	230	250	280	300	350	400	450	500	550	600	650	
A	155 mm														
H	60 mm														


## SLXADSK Wall Bracket

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	163	175	205	225	255	276	280	300	329	380	430	480	508	536	-
X	60 mm														




## SLXADSK11 Wall Bracket 11

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	166	178	208	228	258	279	283	303	332	383	433	483	511	539	-
X	70 - 110 mm														




## SLXADSK21 Wall Bracket 21

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	166	178	208	228	258	279	283	303	-	-	-	-	-	-	-
X	120 - 210 mm														




## SLXAGK Guy Wire Bracket

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650




## SLXAAK Hold-Down Clamp


d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650



## SLXACOB Storm Collar


d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	240	260	290	310	370	390	420	440	490	540	590	640	690	740	790
C	80	80	80	80	80	80	100	100	100	100	100	100	100	100	100






**SLXAHT Adjustable Support**

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
C	200 - 300 - 400 - 500 - 600 mm														




**SLXAHTU Long Adjustable Support**

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
C	610 - 1000 mm														




**SLXABK Locking Band**

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	47 mm														



**SLXABKi Locking Band**

D	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
A	17 mm														




**SLXABKT Structural Locking Band**

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	200 mm														


## SLXADK30 Wall Plate 30

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	330	350	380	400	430	450	480	500	550	600	650	-	-	-	-
B	175	190	205	220	235	250	265	280	310	335	360	-	-	-	-

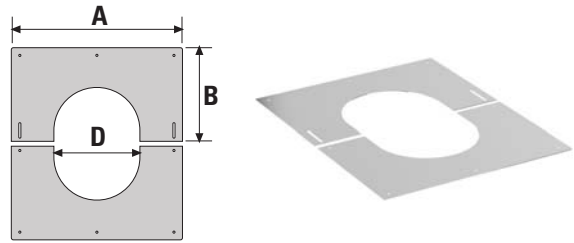


## SLXADK45 Wall Plate 45

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	330	350	380	400	430	450	480	500	550	600	650	-	-	-	-
B	195	210	230	245	270	280	300	320	350	410	460	-	-	-	-

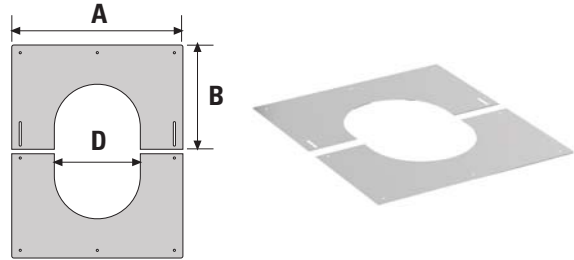


## SLXADK90 Wall Plate 90

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	330	350	380	400	430	450	480	500	550	600	650	-	-	-	-
B	175	185	200	210	225	235	250	260	285	310	335	-	-	-	-

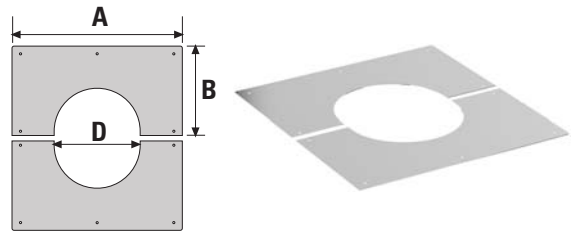


## SLXAOK30 Oval Wall Plate 30

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	330	350	380	400	430	450	480	500	550	600	650	-	-	-	-
B	185	198	215	227	244	255	273	285	313	340	370	-	-	-	-

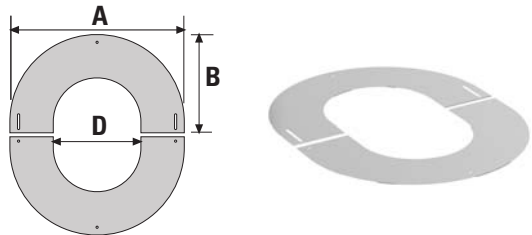


## SLXAOK45 Oval Wall Plate 45


d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	330	350	380	400	430	450	480	500	550	600	650	-	-	-	-
B	205	218	239	253	274	288	310	324	359	385	420	-	-	-	-

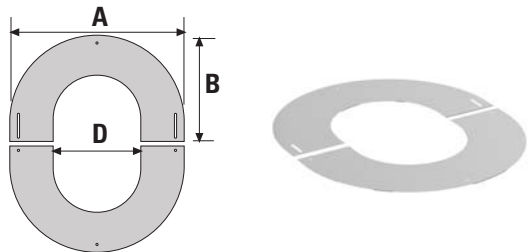

## SLXAOK90 Oval Wall Plate 90


d	8	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	330	350	380	400	430	450	480	500	550	600	650	-	-	-	-

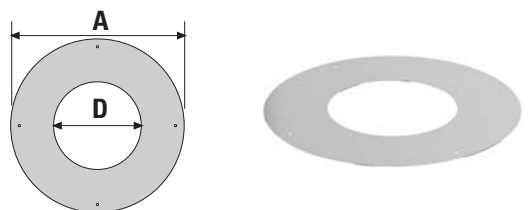

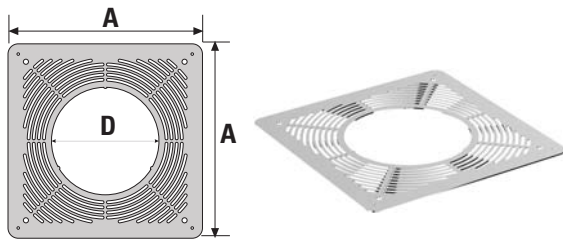


**SLXAYKP Fire Stop Plate**

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	310	330	360	380	410	430	460	480	530	580	630	-	-	-	-
A	310	330	360	380	410	430	460	480	530	580	630	-	-	-	-

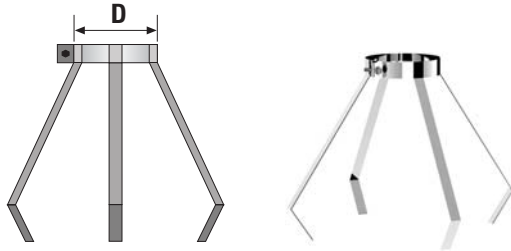


**SLXAHK Distance Clamp**

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650

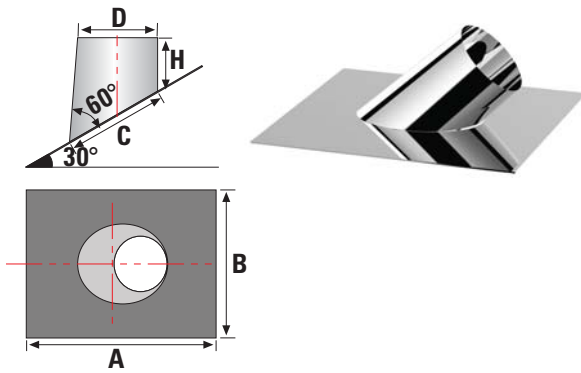


**SLXAC030 Flashing 30**

d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	580	600	630	660	690	710	740	770	820	880	930	980	-	-	-
B	530	580	610	640	670	690	720	750	800	860	910	960	-	-	-
H	150	150	150	150	150	150	150	150	150	150	150	150	-	-	-
C	130	195	230	255	290	310	345	370	425	485	540	600	-	-	-

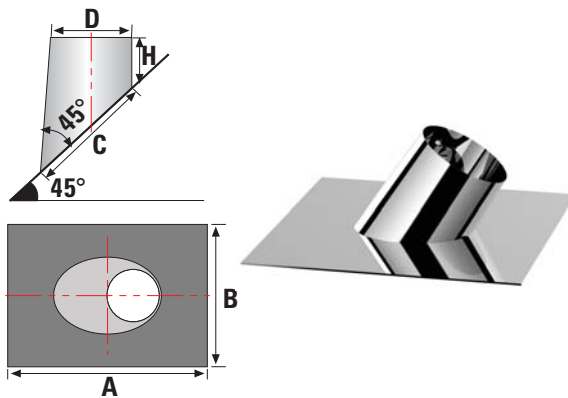

**SLXAC045 Flashing 45**


d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	595	640	680	710	750	780	825	850	920	960	1000	1100	-	-	-
B	575	620	660	690	730	760	805	830	900	940	980	1080	-	-	-
H	150	150	150	150	150	150	150	150	150	150	150	150	-	-	-
C	195	240	280	310	350	380	425	450	520	590	665	735	-	-	-

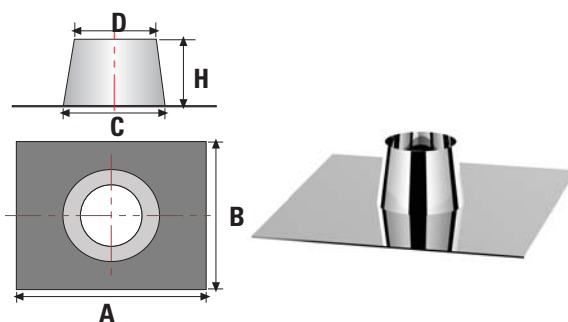


**SLXAC090 Flashing 90**


d	80	100	130	150	180	200	230	250	300	350	400	450	500	550	600
D	130	150	180	200	230	250	280	300	350	400	450	500	550	600	650
A	590	610	640	660	690	710	740	760	810	860	910	960	-	-	-
B	590	610	640	660	690	710	740	760	810	860	910	960	-	-	-
H	150	150	150	150	150	150	150	150	150	150	150	150	-	-	-
C	190	210	240	260	290	310	340	360	410	460	510	560	-	-	-




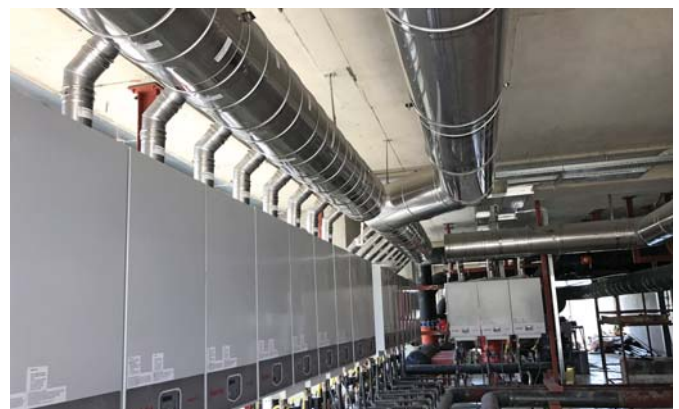

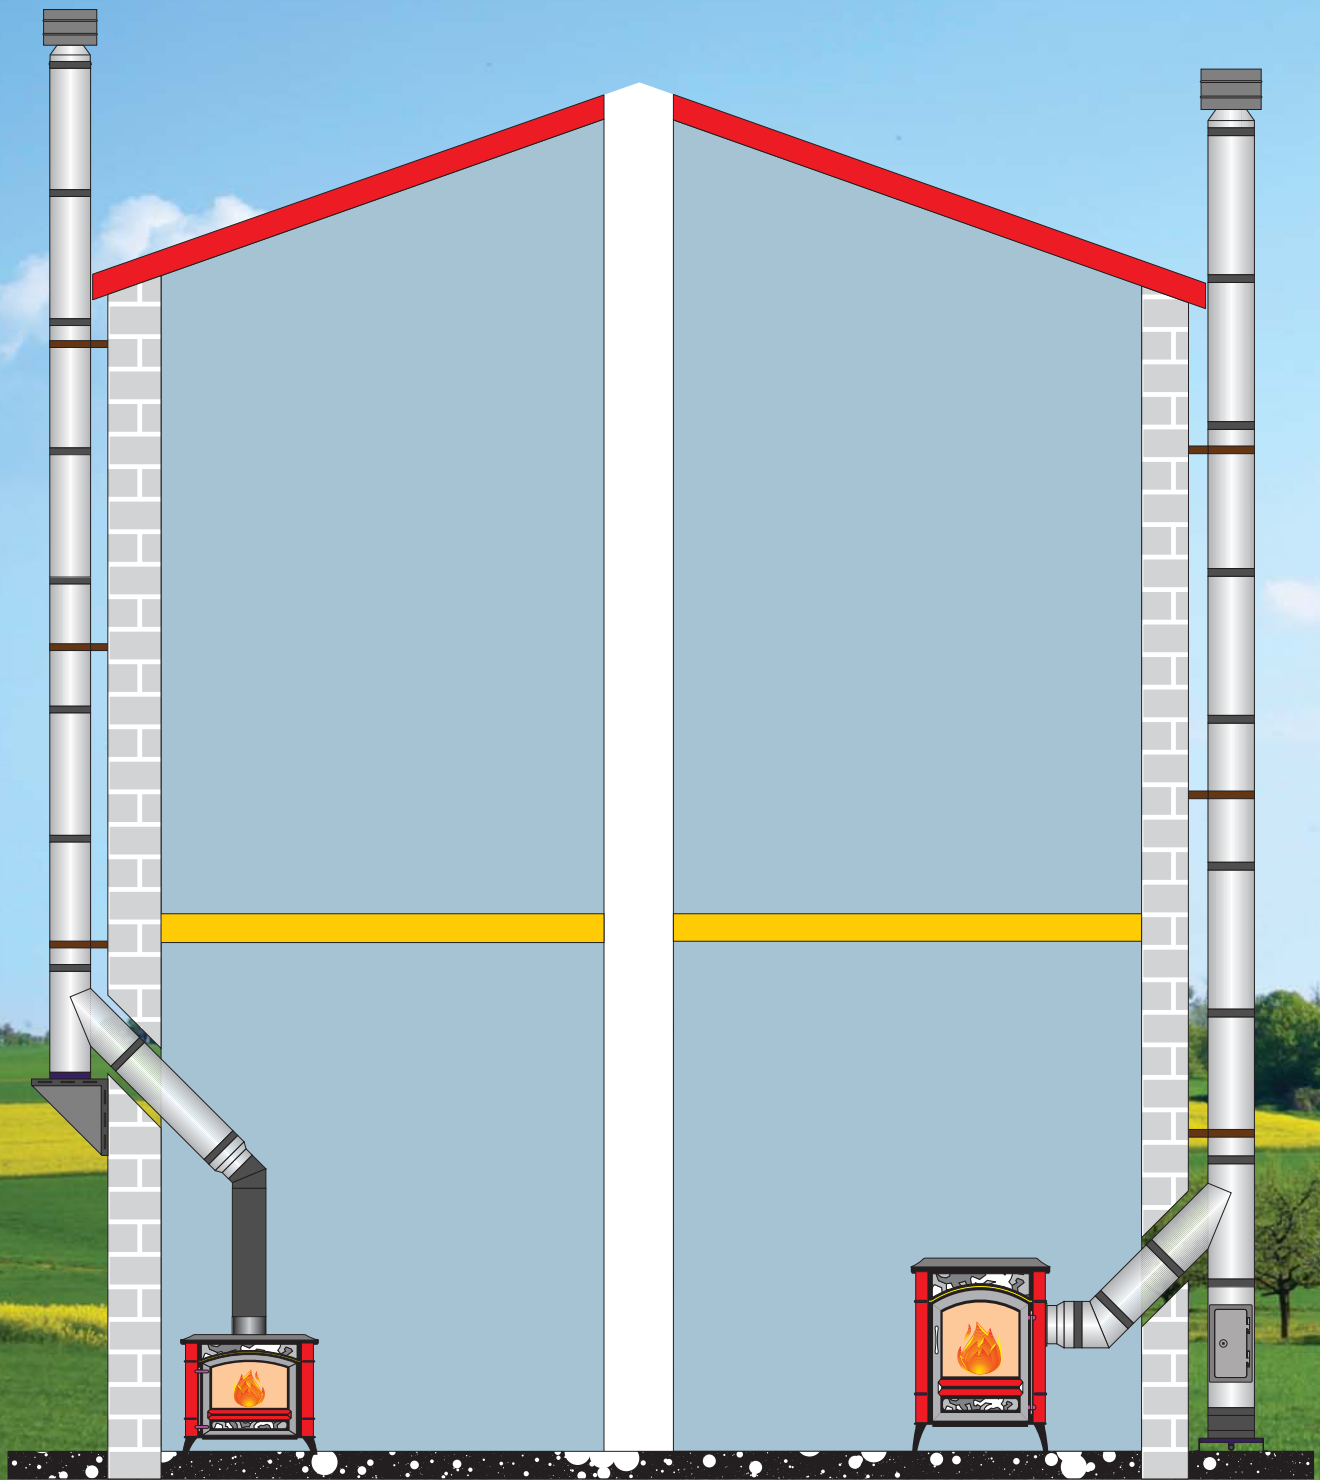



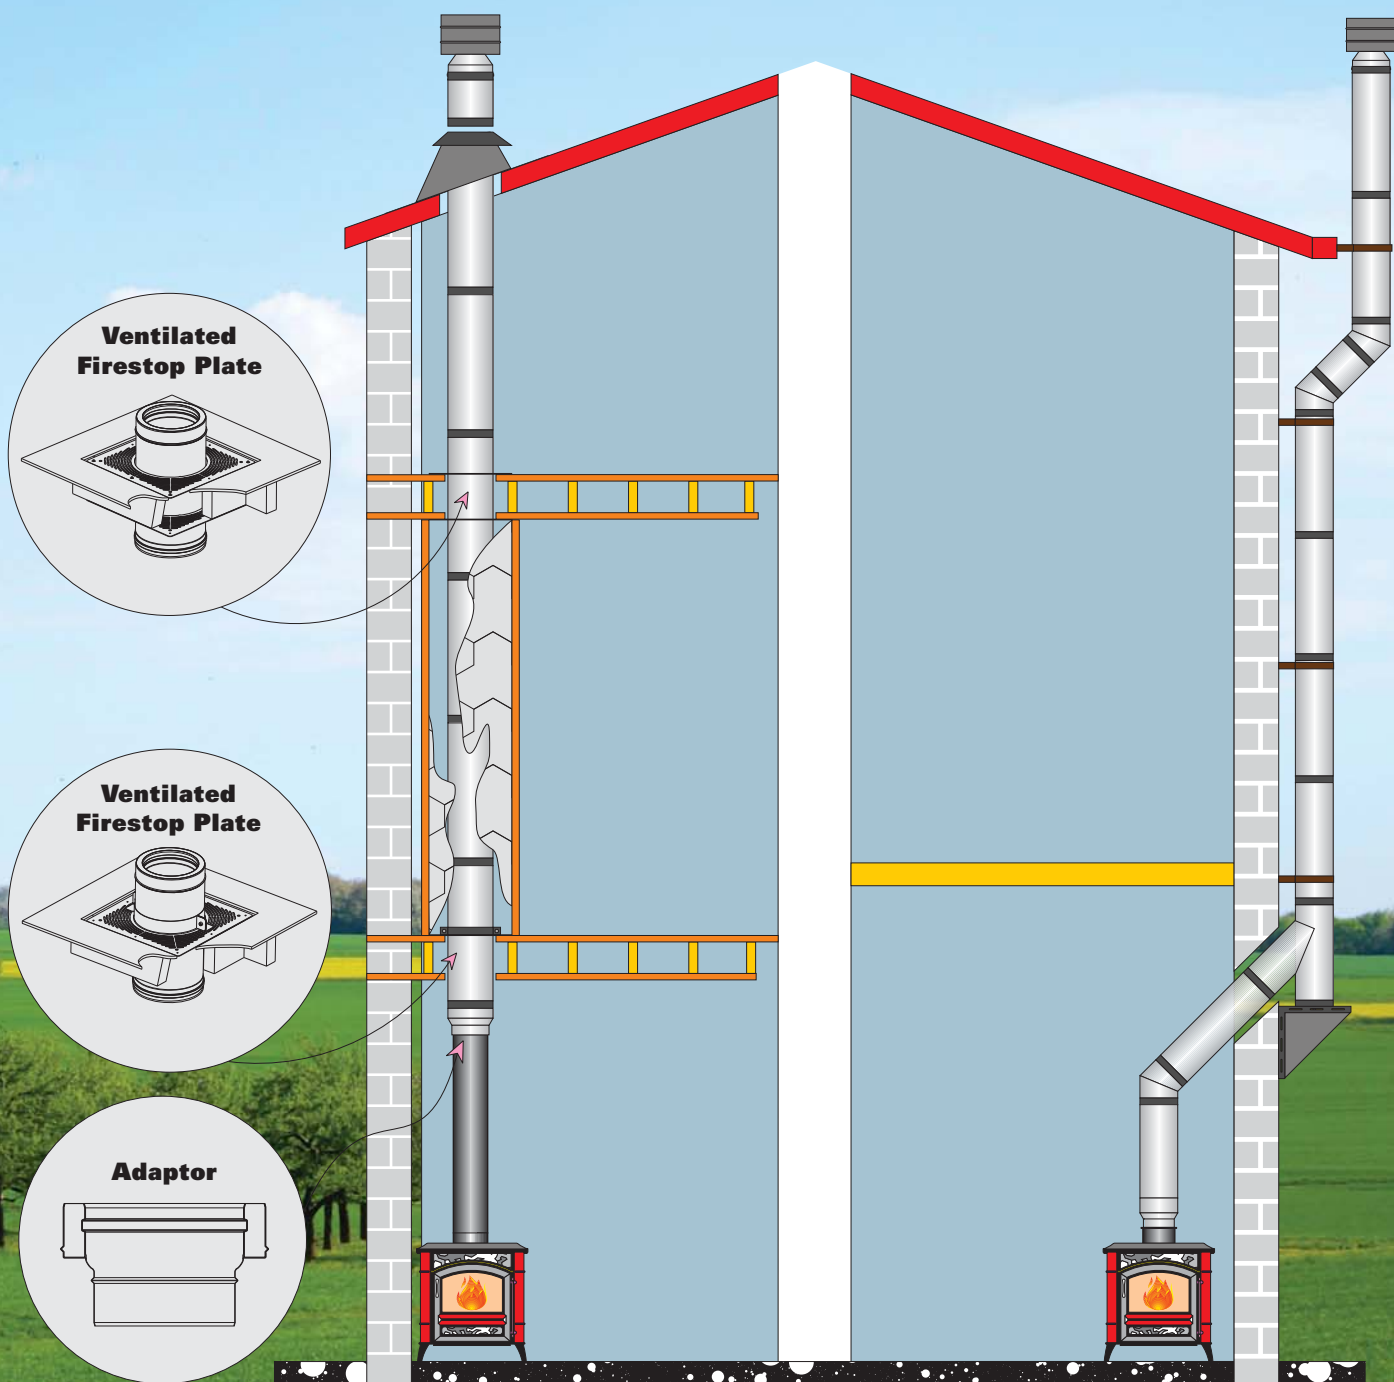

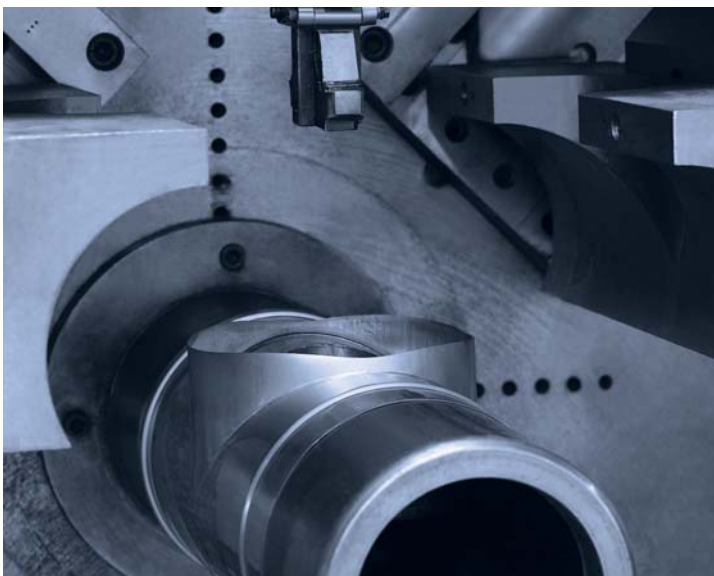

We reserve the right to change the technical details without previous notice.









1020



Murat ankırlı İnaaat Mak. Gıda San. ve Tic. Ltd. Őti.  
Fevzi akmak Mah. 10646 Sk. No:6-8 Karatay - KONYA - TRKİYE  
Tel : +90 332 239 18 07-08 Fax : +90 332 239 18 09  
[www.solinox.com.tr](http://www.solinox.com.tr) - [info@solinox.com.tr](mailto:info@solinox.com.tr)